

## ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc /18 A Output

**bel**  
POWER PRODUCTS

0RQB-D0T12x

RoHS Compliant

Rev.B

- Fixed Frequency (300 kHz)
- Isolated
- High Efficiency
- High Power Density
- Input Under Voltage Lockout
- Basic Insulation
- Output Over Voltage Latch Off
- Over Temperature Protection
- SCP/OCP
- Low Cost
- Remote On/Off



### Description

The 0RQB-D0T12x are isolated dc/dc converters that operate from a nominal 48 Vdc source. These units will provide up to 216 W of output power from a nominal 48 Vdc input. These units are designed to be highly efficient and low cost. Features include remote on/off, over current protection, input under-voltage and output over voltage protection. These converters are provided in an industry standard quarter brick package.

### Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
12 Vdc	36 Vdc - 75 Vdc	18 A	216 W	92.5%	0RQB-D0T120	0RQB-D0T12L

- Notes:** 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.  
2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

### Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	80 V	
Remote On/Off	-0.3 V	-	18 V	
I/O Isolation Voltage	-	-	2250 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

**Note:** All specifications are typical at 25 °C unless otherwise stated.

### Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36 V	48 V	75 V	
Input Current (no load)	-	110 mA	200 mA	
Input Current (full load)	-	-	7 A	
Remote Off Input Current	-	4 mA	7 mA	
Input Reflected Ripple Current (pk-pk)	-	20 mA	-	With simulated source impedance of 12 uH, 5 Hz to 20 MHz; use a 220uF/100 V electrolytic capacitor with ESR = 1 ohm max. at 200 kHz
Input Reflected Ripple Current (rms)	-	5 mA	-	
I <sup>2</sup> t Inrush Current Transient	-	TBD	-	
Turn-on Voltage Threshold	-	34 V	35 V	
Turn-off Voltage Threshold	31 V	33 V	-	

**Note:** All specifications are typical at nominal input, full load at 25 °C unless otherwise stated

## ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc /18 A Output



### Output Specifications

Parameter	Min	Typ	Max	Notes	
Output Voltage Set Point	11.76 V	12 V	12.24 V	V <sub>in</sub> =48 V, I <sub>o</sub> =100%Load	
Line Regulation	-	20 mV	-		
Load Regulation	-	30 mV	-		
Regulation Over Temperature (-40 °C to 85 °C)	-	0.02%Vo/°C	-		
Output Current	0 A	-	18 A		
Current Limit Threshold	19 A	21 A	27 A		
Ripple and Noise (rms)	-	30 mV	50 mV	0 - 20 MHz BW, with 1 uF ceramic load capacitor and a 10uF Tantalum capacitor at the output	
Ripple and Noise (pk-pk)	-	85 mV	150 mV		
Turn on Time	-	10 mS	-		
Overshoot at Turn on	-	0%	5%		
Output Capacitance	-	-	6000 uF		
<b>Transient Response</b>					
50% ~ 75% Max Load	Overshoot	V <sub>o</sub> =12 V	-	300 mV	di/dt=0.1A/us, V <sub>in</sub> =48Vdc, T <sub>a</sub> =25 °C, with 1 uF ceramic capacitor and a 10uF Tantalum capacitor at the output.
	Settling Time		-	100 uS	
75% ~ 50% Max Load	Overshoot		-	300 mV	
	Settling Time		-	100 uS	

**Note:** All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

### General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency	89%	92.5%	-	V <sub>in</sub> =48 V, full load
Switching Frequency	270 kHz	300 kHz	330 kHz	
Isolation Capacitance	-	3000 pF	-	
Input to Output Isolation Voltage	-	-	2250 V	
Remote Sense Compensation	-	-	10%	The voltage increased by trim and sense should not exceed 110%V <sub>out</sub> .
Output Voltage Trim Range	90%	-	110%	
Over Temperature Protection	-	130 °C	-	
Over Voltage Protection	13.5 V	-	15 V	V <sub>in</sub> =48 V, I <sub>o</sub> =full load, Latch mode
MTBF	1,632,203 hours			Calculated Per Bell Core SR-332 (V <sub>in</sub> =48 V, V <sub>o</sub> =12 V, I <sub>o</sub> =14.4 A, 300LFM forced air flow, T <sub>a</sub> = 25 °C)
Dimensions				
Inches (L x W x H)	2.30 x 1.45 x 0.394			
Millimeters (L x W x H)	58.42 x 36.83 x 10.00			
Weight	-	48 g	-	

**Note:** All specifications are typical at 25 °C unless otherwise stated.

# ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc /18 A Output



## Control Specifications

Parameter	Min	Typ	Max	Notes	
<b>Remote On/Off</b>					
Signal Low (Unit On)	Active Low	-0.3 V	-	0.8 V	The Remote On/Off pin is open, Unit off.
Signal High (Unit Off)		2.4 V	-		
Signal Low (Unit Off)	Active High	-0.3 V	-	0.8 V	The Remote On/Off pin is open, Unit on
Signal High (Unit On)		2.4 V	-		

## Output Trim Equations

Equations for calculating the trim resistor are shown below. The Trim Down resistor should be connected between the Trim pin and GND pin. The Trim Up resistor should be connected between the Trim pin and the Vout pin. Only one of the resistors should be used for any given application.



$$R_{trimdown} = \frac{511}{|\delta|} - 10.22 [k\Omega]$$

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 625}{1.225 \cdot \delta} - 10.22 [k\Omega]$$


**Note:**

$$\delta = \frac{(V_o_{req} - V_o)}{V_o} \times 100 [\%]$$

Output voltage  $V_o = 12.004 \text{ V}$

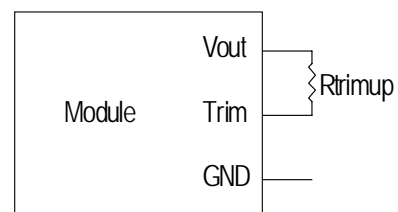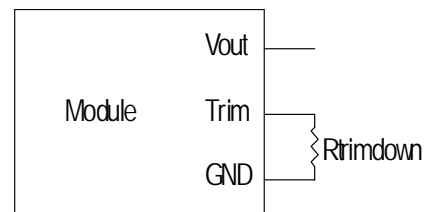

## Efficiency Data

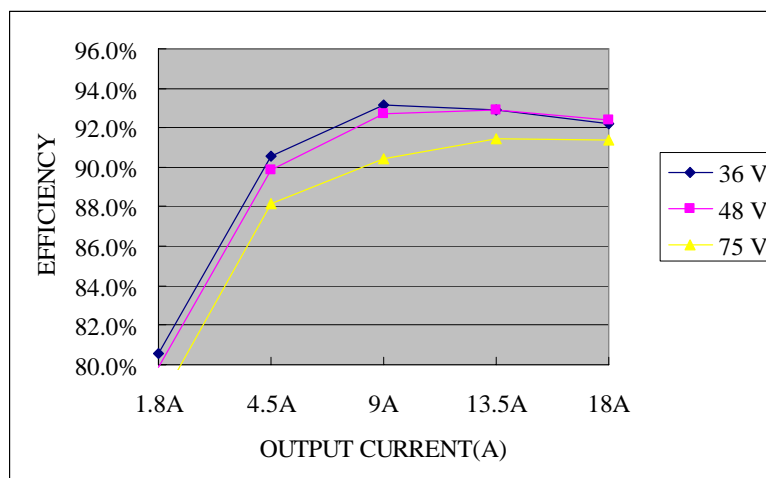


## ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc /18 A Output


**bel**  
POWER PRODUCTS

### Thermal Derating Curve

Vin=48V, with maximum junction temperature of semiconductors derated to 120°C.

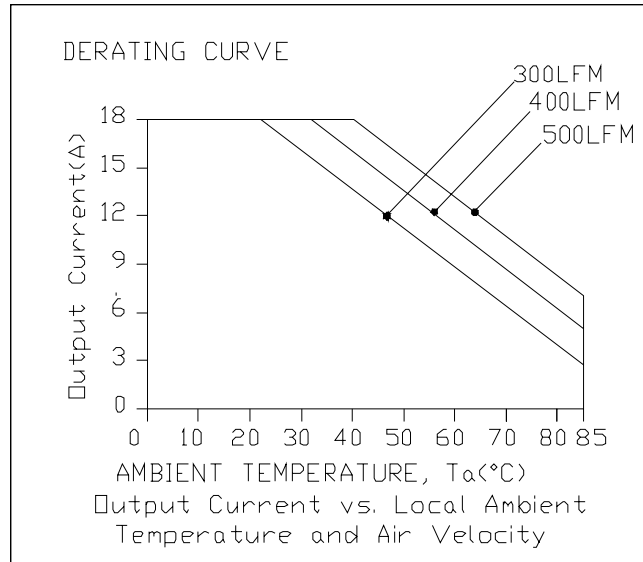

### Ripple and Noise Waveform

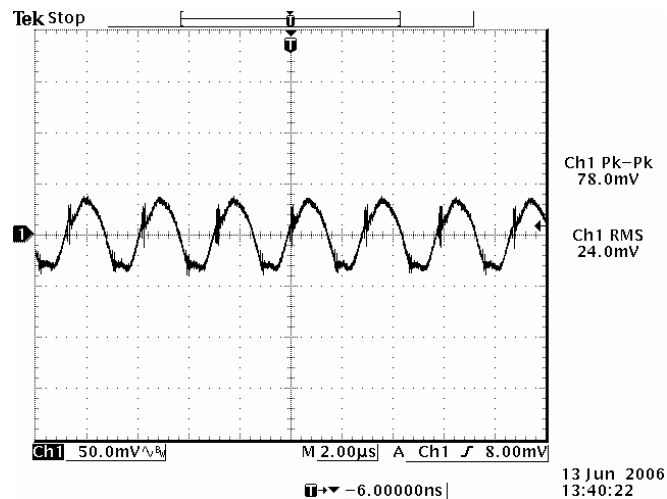


**Note:** Ripple and noise at full load, 48 Vdc input, 12 Vdc/18 A output, and with a 1 uF ceramic cap and a 10 uF tantalum cap at the output,  $T_a=25$  deg C.

# ISOLATED DC/DC CONVERTERS


48 Vdc Input 12 Vdc /18 A Output



## Transient Response Waveforms

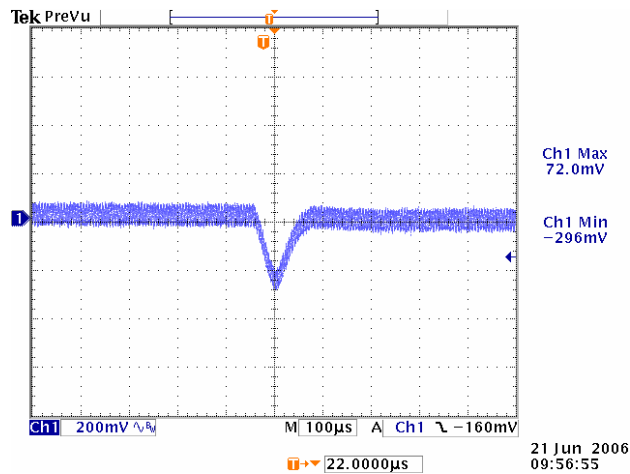

Vout= 12 V 50%-75% Load Transients at Vin=48 V@Ta=25°C

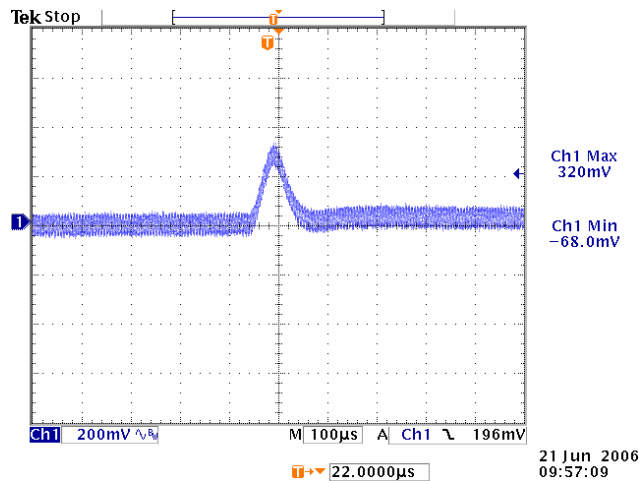

Vout= 12 V 75%-50% Load Transients at Vin=48 V@Ta=25°C



**Note:** Transients response at  $di/dt=0.1$  A/us, Vin=48 Vdc, Ta=25 °C, with 1 uF ceramic capacitor and a 10uF Tantalum capacitor at the output.

# ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc /18 A Output



## Mechanical Outline

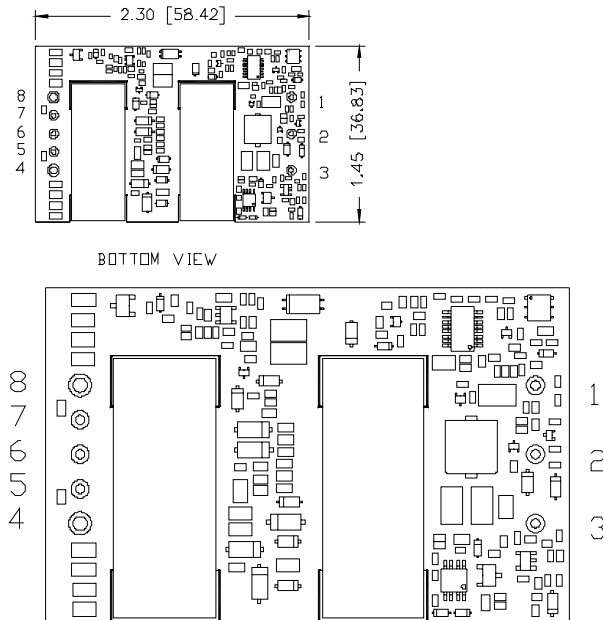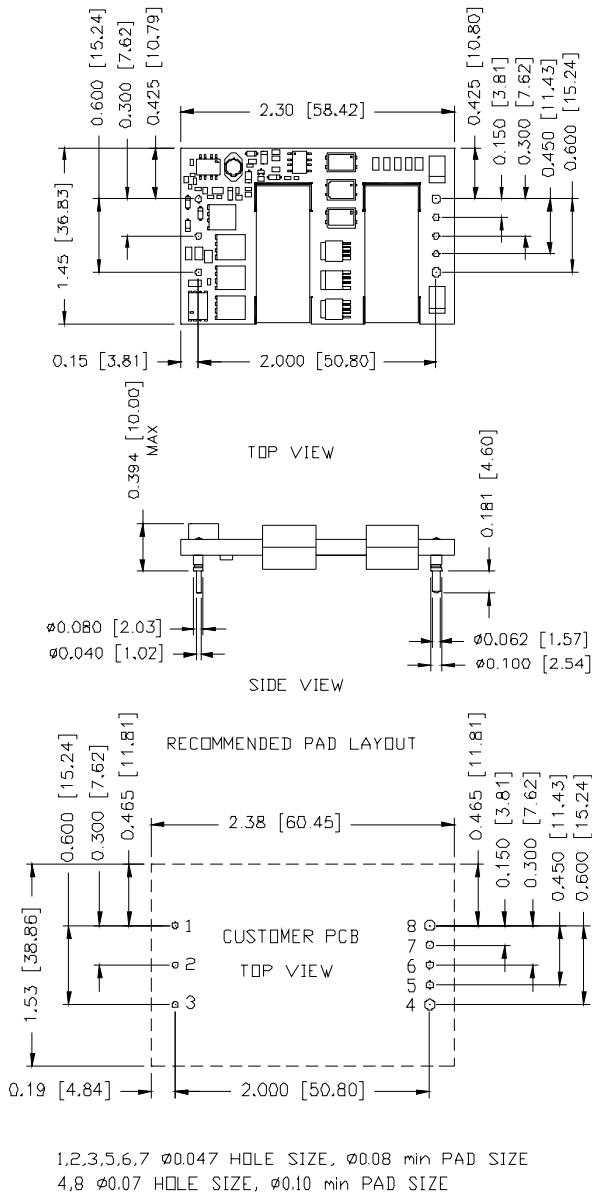

BOTTOM VIEW

## Pin Connections

Pin	Function	Pin Size
1	Vin(+)	0.040"
2	On/Off	0.040"
3	Vin(-)	0.040"
4	Vo(-)	0.062"
5	RS(-)	0.040"
6	Trim	0.040"
7	RS(+)	0.040"
8	Vo(+)	0.062"

## RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 121107

### CORPORATE

**Bel Fuse Inc.**  
 206 Van Vorst Street  
 Jersey City, NJ 07302  
 Tel 201-432-0463  
 Fax 201-432-9542  
[www.belfuse.com](http://www.belfuse.com)

### FAR EAST

**Bel Fuse Ltd.**  
 8F/ 8 Luk Hop Street  
 San Po Kong  
 Kowloon, Hong Kong  
 Tel 852-2328-5515  
 Fax 852-2352-3706  
[www.belfuse.com](http://www.belfuse.com)

### EUROPE

**Bel Fuse Europe Ltd.**  
 Preston Technology Management Centre  
 Marsh Lane, Suite G7, Preston  
 Lancashire, PR1 8UD, U.K.  
 Tel 44-1772-556601  
 Fax 44-1772-888366  
[www.belfuse.com](http://www.belfuse.com)