

ISOLATED DC/DC CONVERTERS

36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick



Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.

0RQB-Q2T06x

RoHS Compliant

Rev.I

Features

- Isolated
- High Efficiency
- High Power Density
- Fixed Frequency (300 kHz)
- Low Cost
- Input Under-Voltage Lockout
- Class 1, Category 2, Isolated DC/DC Converter (refer to IPC-9592)
- UL60950-1 Recognized (UL/cUL) (Pending)
- Output Over-Voltage Shutdown
- Over Temperature Protection
- OCP/SCP
- Remote On/Off
- Basic Insulation
- Input Over-Voltage Lockout

Applications

- Networking
- Computers and peripherals
- Telecommunications

Description

The 0RQB-Q2T06x is an isolated dc/dc converter that operates from a nominal 48 Vdc source. This unit will provide up to 390 W of output power from a nominal 48 Vdc input. This unit is designed to be highly efficient and low cost. Features include remote on/off, over current protection and under voltage lockout. The converter is provided in an industry standard quarter brick package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
6.5 Vdc	36 Vdc - 75 Vdc	60 A	390 W	94.5%	0RQB-Q2T065	0RQB-Q2T06L

Notes: Add "G" suffix at the end of the model number to indicate Tray Packaging.

Part Number Explanation

0 R QB - Q2 T 06 5
1 2 3 4 5 6 7

1---Through hole

2---RoHS 6, change "R" to "7" means RoHS 5

3---Series name, 1/4 Brick

4---Series code

5---Input range 48V wide (36-75V)

6---Output voltage (6.5V)

7---Enable, "5" means active high, and "L" means active low

ISOLATED DC/DC CONVERTERS

36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick



Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Unit	Notes
Continuous Input Voltage	-0.3	-	80	V	
Input Transient Voltage	-	-	100	V	100 mS maximum
Remote On/Off	-0.3	-	18	V	
I/O Isolation Voltage	-	-	1500	V	
Ambient Temperature	-40	-	85	°C	
Storage Temperature	-55	-	125	°C	

Note: Ratings used beyond the maximum ratings may cause a reliability degradation of the converter or may permanently damage the device.

Input Specifications

Parameter	Min	Typ	Max	Unit	Notes
Operating Input Voltage	36	48	75	V	
Input Current (full load)	-	-	15.3	A	
Input Current (no load)	-	140	180	mA	
Remote Off Input Current	-	15	20	mA	
Input Reflected Ripple Current (rms)	-	15	25	mA	Tested with simulated source impedance of 10 μ H, 5 Hz to 20 MHz; use a 220 μ F/100 V electrolytic capacitor with ESR = 1 ohm max. at 200 kHz at 25 °C.
Input Reflected Ripple Current (pk-pk)	-	50	80	mA	
I ² t Inrush Current Transient	-	-	1	A ² s	
Turn-on Voltage Threshold	-	34.5	35.8	V	
Turn-off Voltage Threshold	32	33.5	-	V	

CAUTION: This converter is not internally fused. An input line fuse must be used in application.

Recommend a fast-acting fuse with maximum rating of 20A on system board. Refer to the fuse manufacturer's datasheet for further information.

- Notes:** 1. This converter has internal C-L-C (1 μ F-0.72 μ H-10.8 μ F) filter.
2. All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Unit	Notes
Output Voltage Set Point	6.37	6.50	6.63	V	V _{in} =48V, I _o =50% load
Load Regulation	-	±15	±40	mV	
Line Regulation	-	±15	±32	mV	
Regulation Over Temperature (-40deg.C-85deg.C)	-	±30	±65	mV	
Ripple and Noise (pk-pk)	-	120	200	mV	0-20 MHz BW, with a 1 μ F ceramic capacitor and a 10 μ F Tantalum cap at output.
Ripple and Noise (rms)	-	30	50	mV	
Ripple and Noise (pk-pk) under worst case	-	-	300	mV	over all operating input voltage, load and temperature conditions.

ISOLATED DC/DC CONVERTERS

36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick



Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Output Specifications (continued)

Parameter	Min	Typ	Max	Unit	Notes	
Output Current Range	0	-	60	A		
Output DC Current Limit	64	72	81	A		
Short Circuit Surge Transient	-	-	6	A ² s		
Rise time	-	20	-	ms		
Turn on Time		60	90	mS	Enable form Vin	
	-	40	70	mS	Enable form ON/OFF	
Overshoot at Turn on	-	0	3	%		
Output Capacitance	0	-	10000	uF		
Transient Response						
△V50%~75% of Max Load	Overshoot	-	-	400	mV	di/dt=0.1A/us, Vin=48Vdc, Ta=25°C, with a 1µF ceramic capacitor and a 10uF Tantalum cap at the output.
	Settling Time	-	-	300	uS	
△V75%~50% of Max Load	Overshoot	-	-	400	mV	
	Settling Time	-	-	300	uS	
△V50%~75% of Max Load	Overshoot	-	-	500	mV	di/dt=1A/us, Vin=48Vdc, Ta=25°C, with a 1µF ceramic capacitor and a 470uF Tantalum cap at the output.
	Settling Time	-	-	300	uS	
△V75%~50% of Max Load	Overshoot	-	-	500	mV	
	Settling Time	-	-	300	uS	

Note: All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

General Specifications

Parameter	Min	Typ	Max	Unit	Notes
Efficiency	-	94.5	-	%	Vin=48V, full load
Switching Frequency	-	300	-	kHz	
Over Temperature Protection	-	125	-	°C	
Over Voltage Protection(Static)	-	8	-	V	This voltage is achieved by trimming up output slowly
Weight	-	71	-	g	
FIT		478		-	Calculated Per Bell Core SR-332 (Vin=48V, Vo=6.5V, Io=30A, 500LFM, Ta = 25 °C, FIT=10 ⁹ /MTBF)
Dimensions					
Inches (L x W x H)		2.30 x 1.45 x 0.50		-	
Millimeters (L x W x H)		58.42 x 36.83 x 12.70			
Isolation characteristics					
Input to Output	-	-	1500	V	
Input to Case	-	-	1500	V	
Output to Case	-	-	500	V	
Isolation Resistance	10M	-		ohm	
Isolation Capacitance	-	2200	-	pF	

Note: All specifications are typical at 25 °C unless otherwise stated.

ISOLATED DC/DC CONVERTERS


36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick





Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Efficiency Data

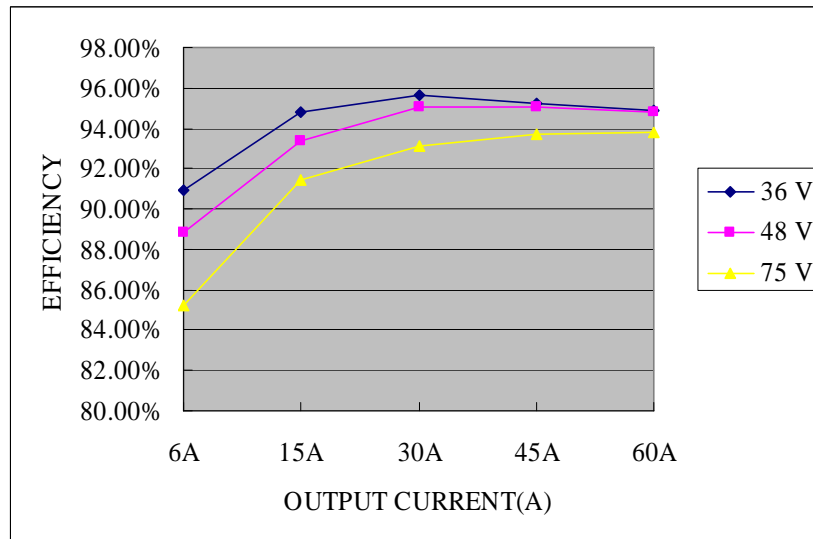

Thermal Derating Curve

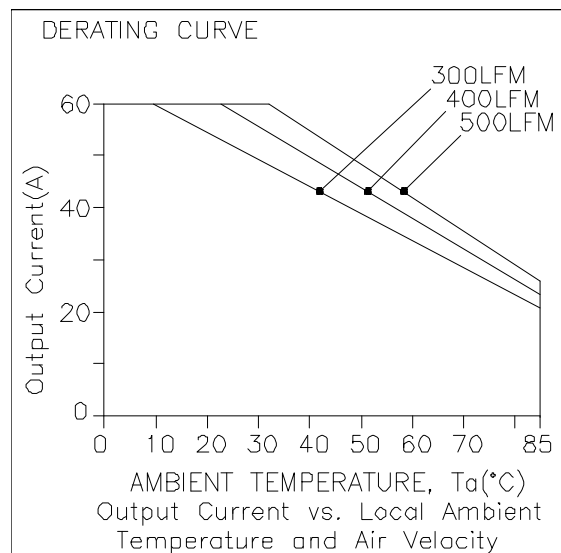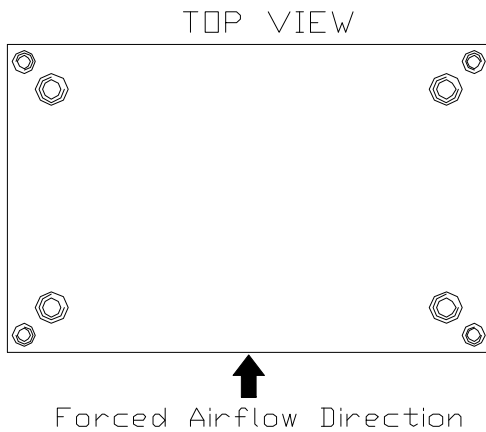

Derating curve under normal input

ISOLATED DC/DC CONVERTERS


36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick



Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.


Ripple and Noise Waveform

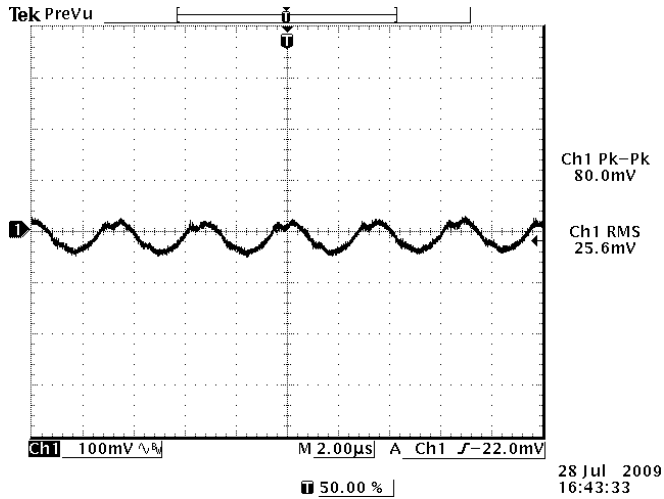


48Vdc input, 6.5Vdc/60A

Note: Ripple and noise at full load, and with a 1uF ceramic cap and a 10 uF Tantalum cap at output.

Transient Response Waveforms

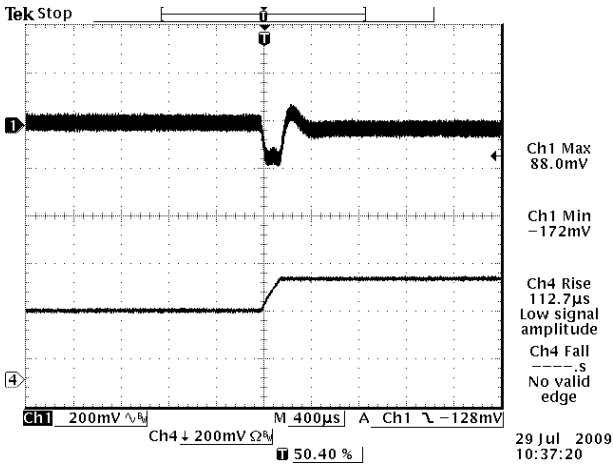

Vout= 6.5V 50%-75% Load Transients

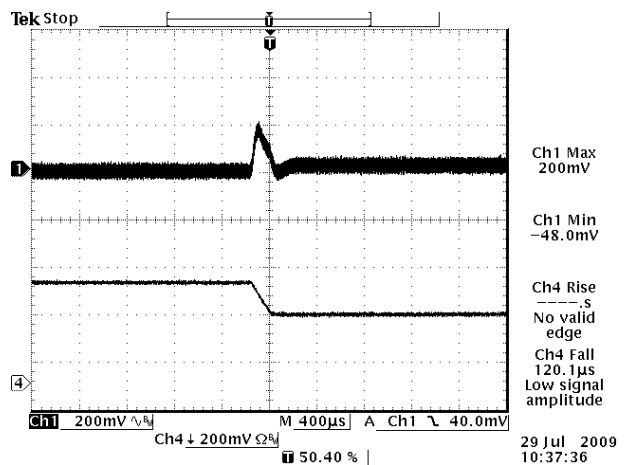

Vout= 6.5V 75%-50% Load Transients

Note: Transient Response at di/dt=0.1A/uS, with 1uF ceramic cap and 10uF aluminum cap at output.

ISOLATED DC/DC CONVERTERS

36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick




Jan. 17, 2011


Bel Power Inc., a subsidiary of Bel Fuse Inc.

Startup & Shutdown

Rise time

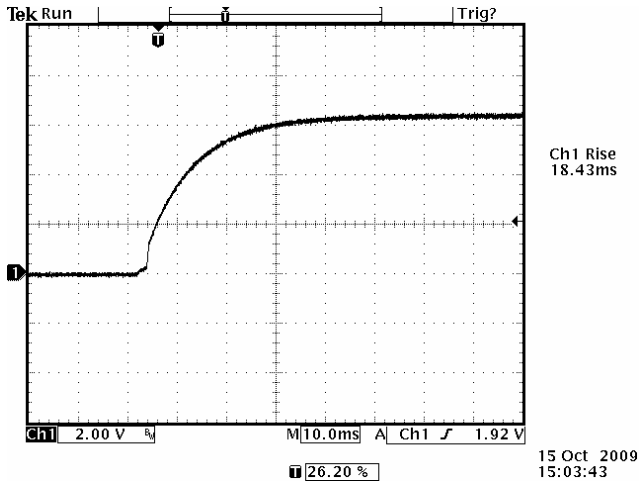


Vout= 6.5V/60A at Vin=48V@Ta=25°C
Cext = 0uF

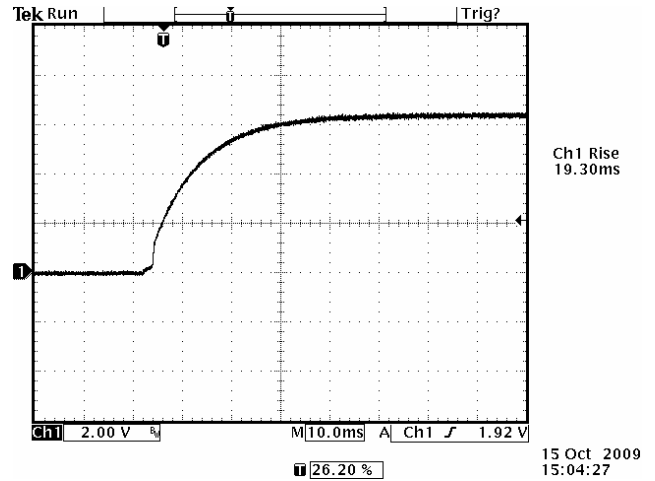


Vout= 6.5V/60A at Vin=48V@Ta=25°C
Cext = 10000uF

Startup time

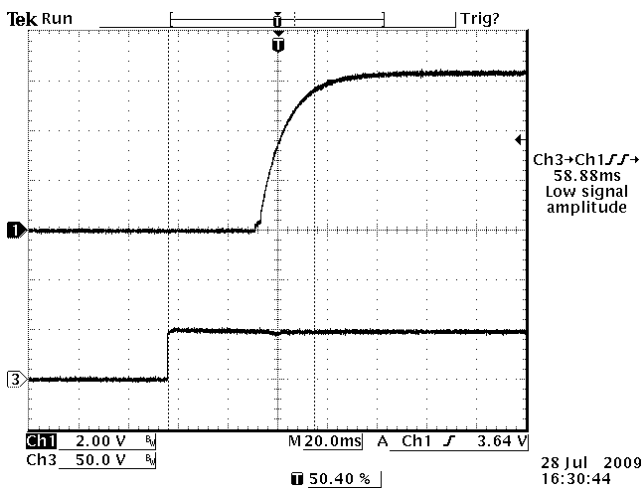

Startup from Vin
Ch1: Vo
Ch3: Vin
Vout= 6.5V/60A at Vin=48V@Ta=25°C
Cext = 10000uF

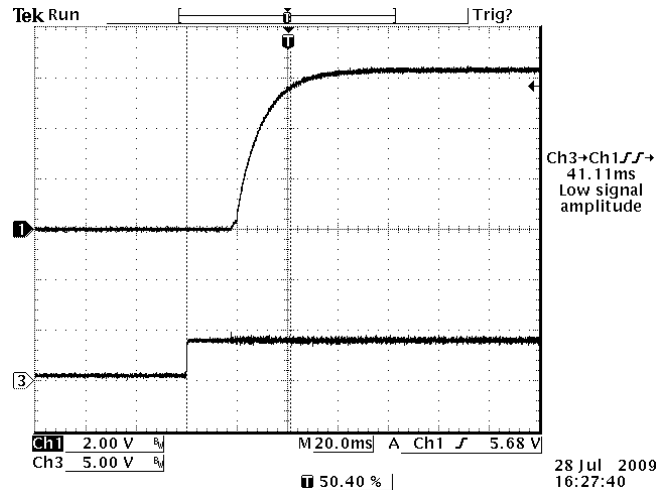


Startup from on/off
Ch1: Vo
Ch3: on/off
Vout= 6.5V/60A at Vin=48V@Ta=25°C
Cext = 10000uF

Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Startup & Shutdown (continued)


Shutdown

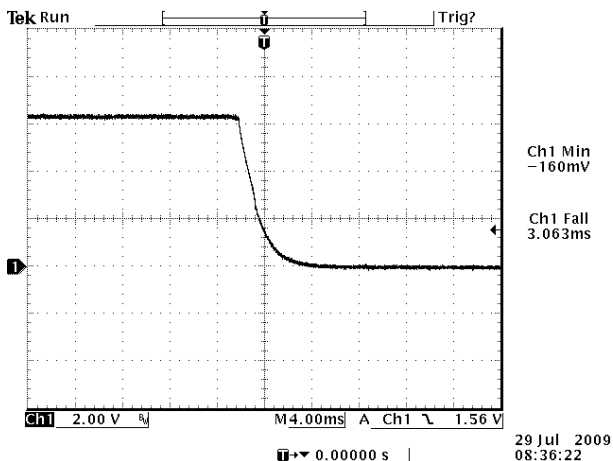


$V_{out} = 6.5V/60A$ at $V_{in} = 48V @ T_a = 25^\circ C$
 $C_{ext} = 10000\mu F$

Over Current Protection

To provide protection in a fault output overload condition, the module is equipped with internal current-limiting circuitry and can endure current limiting for a few milli-seconds. If the over current condition persists beyond a few milliseconds, the module will shut down into hiccup mode and restart once every 400mS. The module operates normally when the output current goes into specified range. The typical average output current is 5A during hiccup.

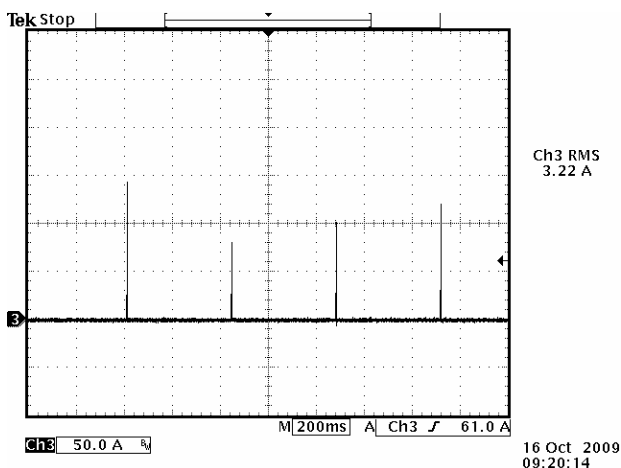

output current waveform

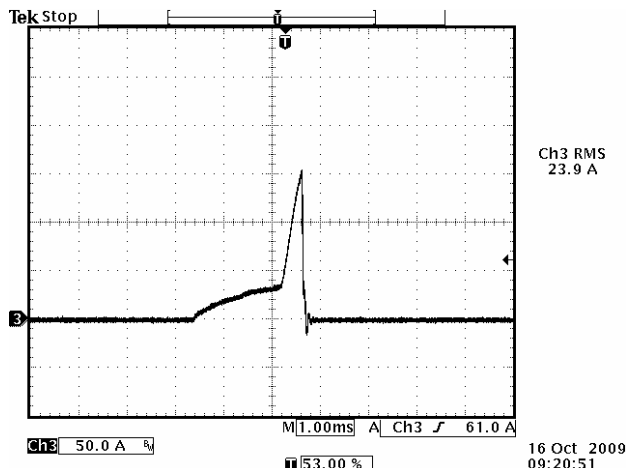

Expansion of on time portion

ISOLATED DC/DC CONVERTERS

36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick




Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.


Over Voltage Protection

The output overvoltage protection consists of circuitry that monitors the voltage on the output terminals. If the voltage on the output terminals exceeds the over voltage protection threshold the module will shutdown into latch off mode. The overvoltage latch can be reset by either cycling the input power or toggling the on/off signal for one second at least.

Test setup:

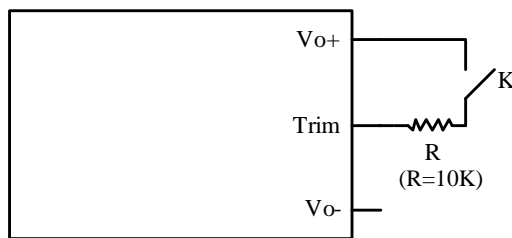

R is the ohmic value of the resistor used for the overvoltage test

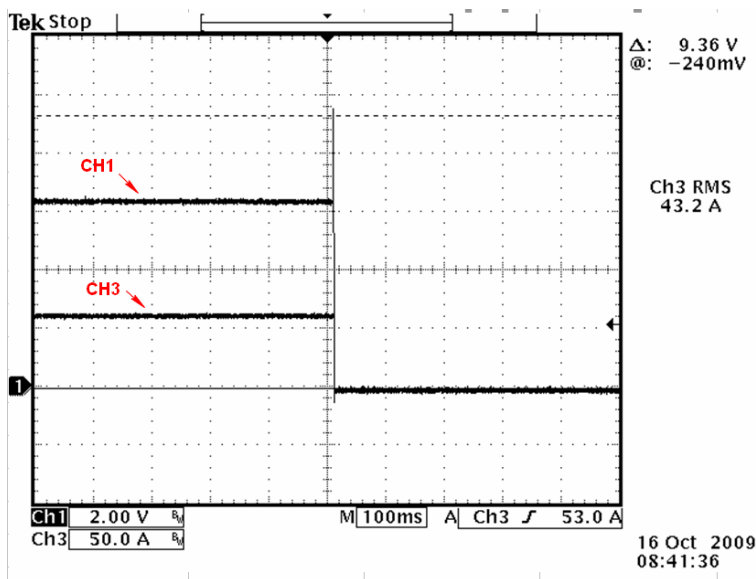

CH1: Output voltage waveform
CH3: Output Current waveform

ISOLATED DC/DC CONVERTERS

36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick



Jan. 17, 2011


Bel Power Inc., a subsidiary of Bel Fuse Inc.

Over Temperature Protection

The OTP is achieved by thermistor R25 and the threshold is set at 105C in non-latch mode; the hottest component Q13 reaches 120C with 500LFM air flow correspondingly. It will restart automatically when the temperature falls down to 100C. The protecting point will be varied a little under different conditions (air flow, ambient temperature, input voltage, load...).



The hottest component on the top side: Q13

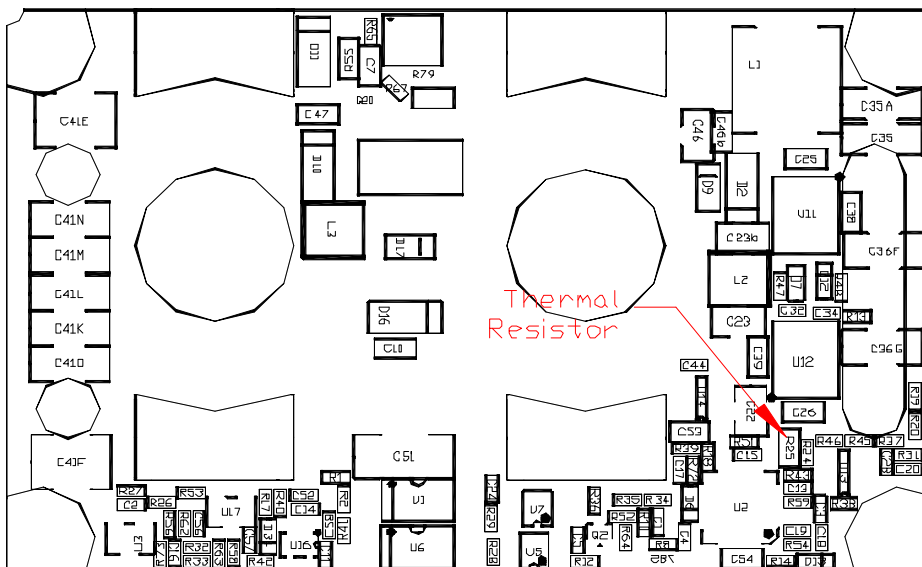

The thermistor on the bottom side: R25

ISOLATED DC/DC CONVERTERS

36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick




Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.


Remote On/Off

Parameter		Min	Typ	Max	Unit	Notes
Signal Low (Unit On)	Active Low	-0.3	-	0.8	V	0RQB-Q2T06L. The remote on/off pin open, Unit off.
Signal High (Unit Off)		2.4	-	18	V	
Signal Low (Unit Off)	Active High	-0.3	-	0.8	V	0RQB-Q2T065. The remote on/off pin open, Unit on.
Signal High (Unit On)		2.4	-	18	V	
Current Sink		0	-	1	mA	


Recommended remote on/off circuit for active low

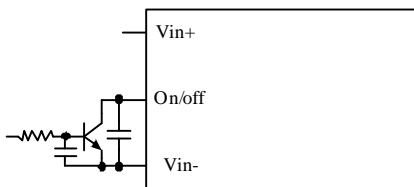


Control with open collector/drain circuit

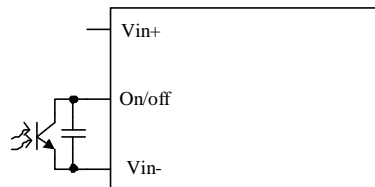

Control with photocoupler circuit

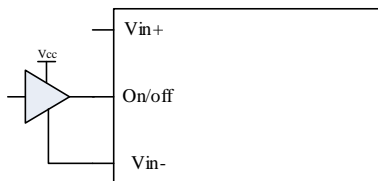


Control with logic circuit




Permanently on


Recommended remote on/off circuit for active high

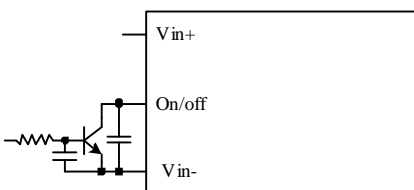


Control with open collector/drain circuit

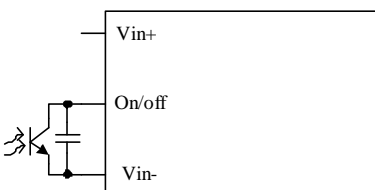

Control with photocoupler circuit

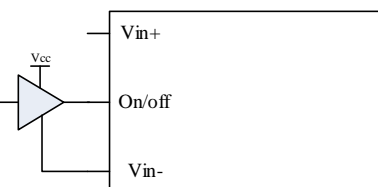

Control with logic circuit



Permanently on

ISOLATED DC/DC CONVERTERS


36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick



Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Input Under-voltage Lockout

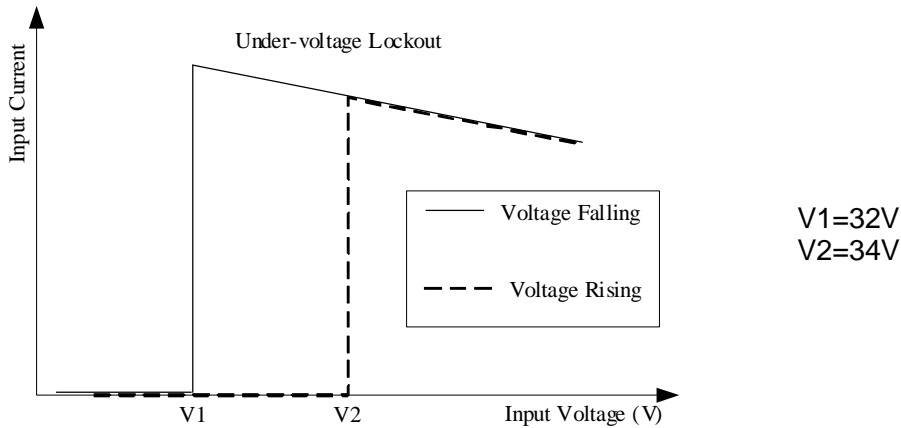

Safety & EMC


Safety

1. Material flammability UL94V-0
2. TUV Certification EN60950-1
3. UL Certification UL60950-1

EMC

1. Surge IEC61000-4-5
2. DC-DIP IEC61000-4-29
3. Conductive EMI EN55022 class A

Compliance to EN55022 class A (both a.peak and average) with the following inductive and capacitive filter

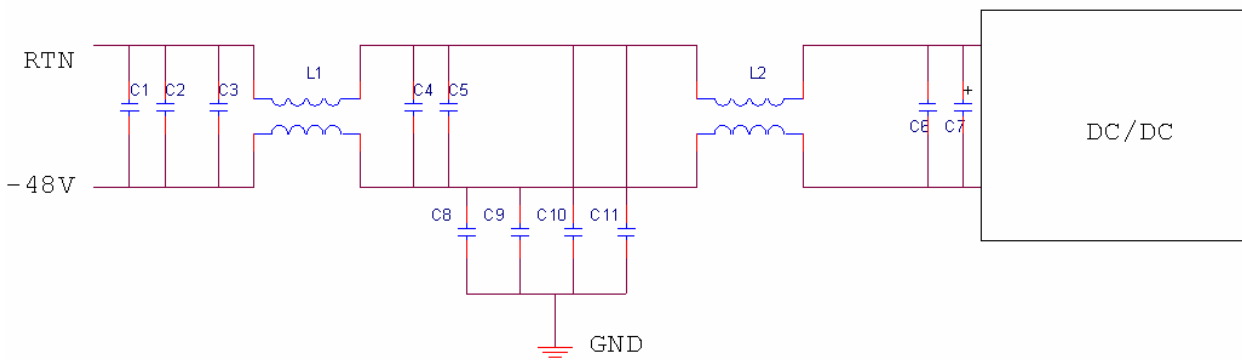

Item	Designator	Parameter
1	C1, C2, C3, C4, C5	100V/1000nF/X7R/1210
2	C6	100V/100nF/±10%/X7R/1206
3	C8, C9, C10, C11	0.22U/630V/X7R/2220
4	C7, C12	N/A
5	L1, L2	473uH/±25%/14A

ISOLATED DC/DC CONVERTERS

36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick




Jan. 17, 2011


Bel Power Inc., a subsidiary of Bel Fuse Inc.

Safety & EMC (continued)

Positive:

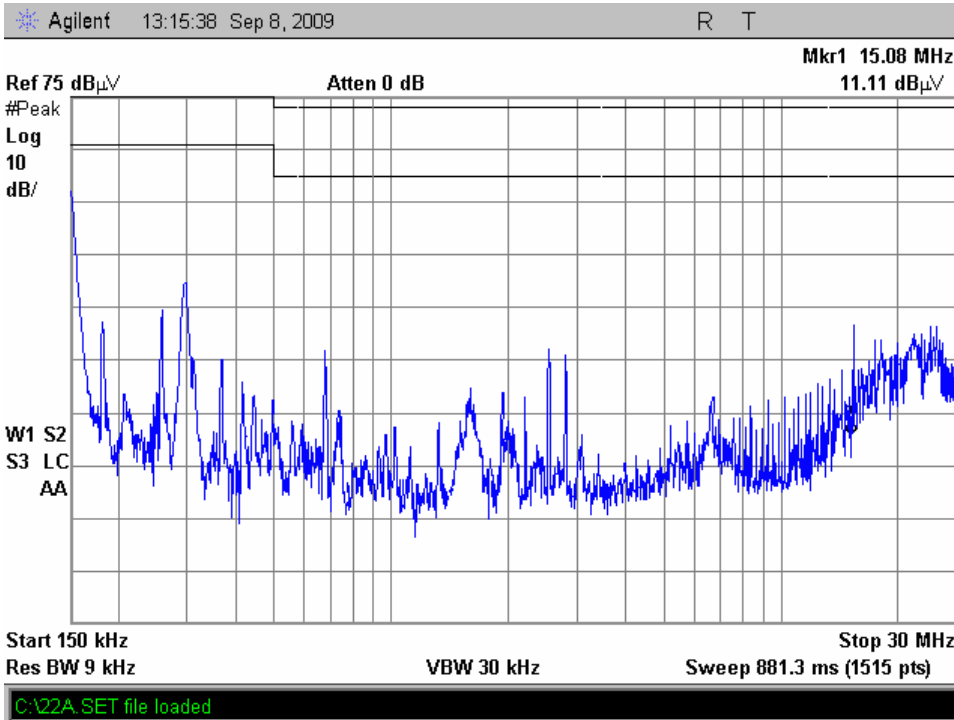

Negative:

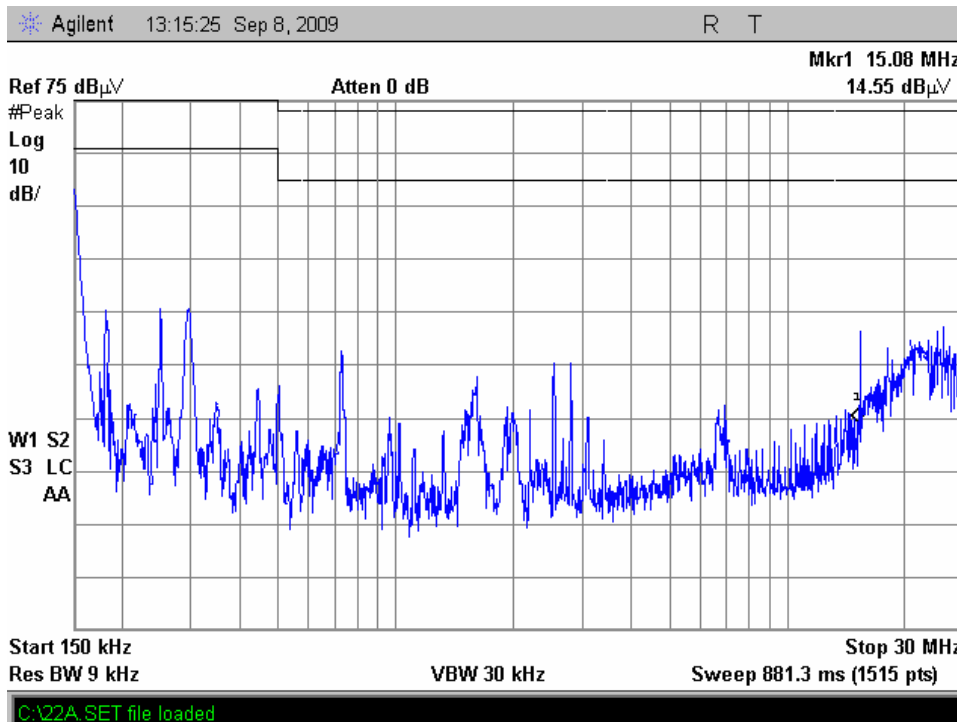

ISOLATED DC/DC CONVERTERS


36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick



Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Mechanical Outline

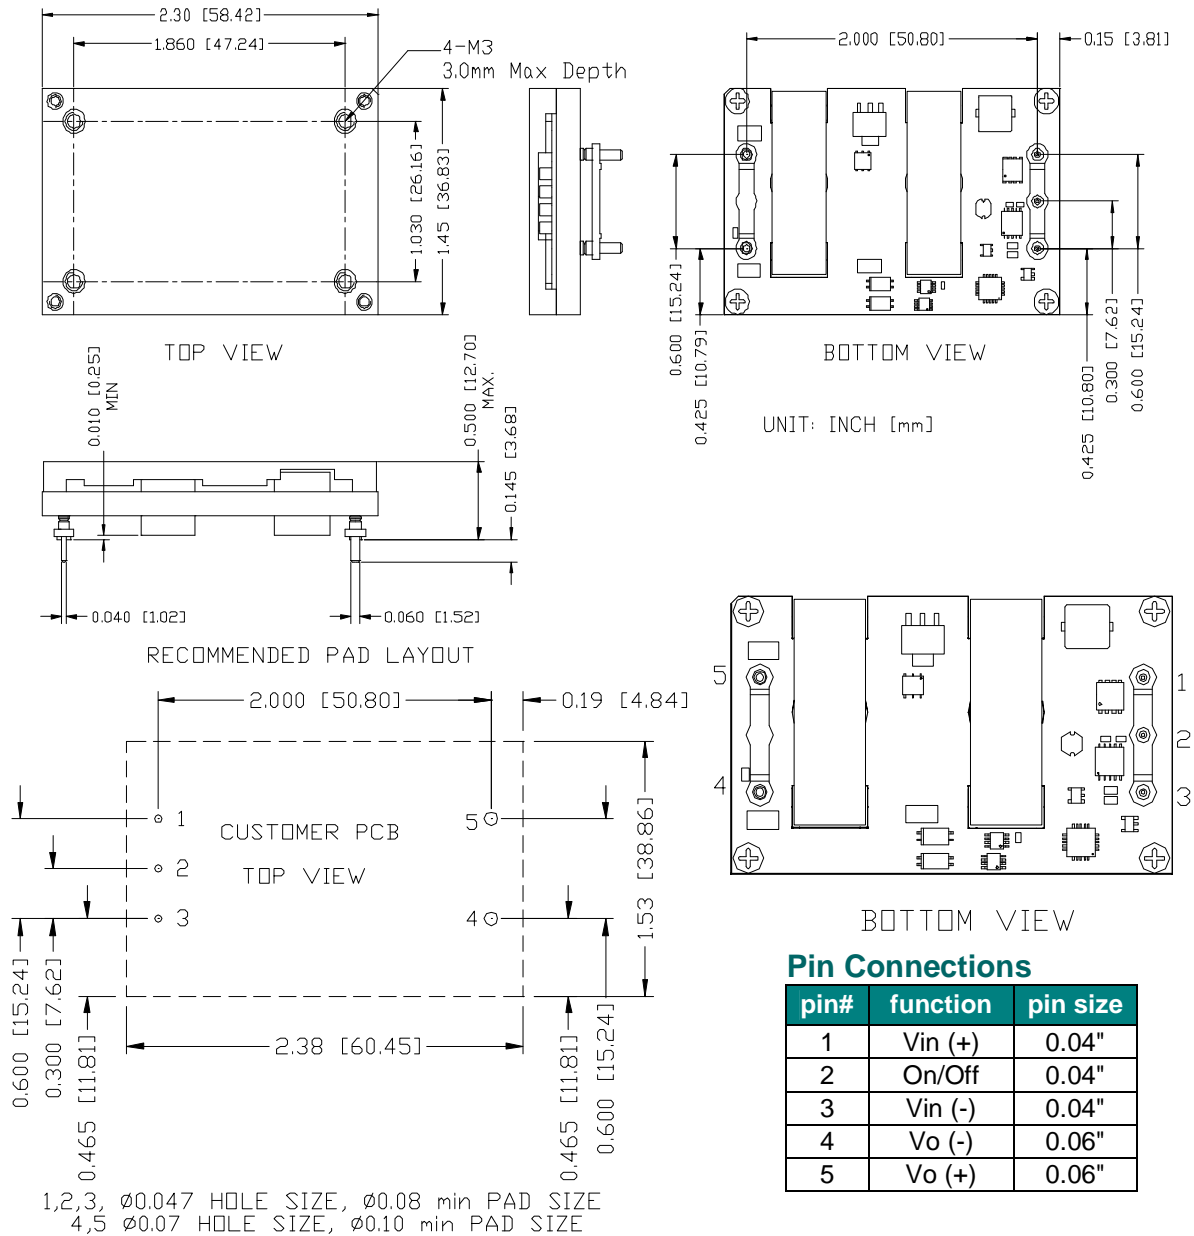

Note: This module is recommended and compatible with Pb-Free Wave Soldering and must be soldered using a peak solder temperature of no more than 260 °C for less than 5 seconds.

Note:

- 1) All Pins: Material - Copper Alloy;
Finish – 3 micro inches minimum Gold over 50 micro inches minimum Nickel plate.
- 2) Undimensioned components are shown for visual reference only.
- 3) All dimensions in inches (mm); Tolerances: x.xx +/-0.02 in. (x.x +/-0.5mm) x.xxx +/-0.010 in. (x.xx +/-0.25mm).

ISOLATED DC/DC CONVERTERS

36 Vdc - 75 Vdc Input 6.5 Vdc /60 A Output, 1/4 Brick



Jan. 17, 2011

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Revision History

Date	Revision	Changes Detail	Approval
2009-06-16	A	First release	Joe Wei
2009-06-23	B	Delete output trim and remote sense function, update mechanical drawing	Joe Wei
2009-06-30	C	1. Update input C-L-C filter; 2. Change Max output cap form 5600uF to 10000uF; 3. Add transient response of di/dt=1A/us; 4. Change output current from 65A to 60A.	Joe Wei
2009-09-25	D	1.Change Switching frequency from 250K to 300K, 2.No load Input current. 3.remote off input current. 4.load regulation. 5.line regulation. 6.regulation over temperature. 7.Output DC current limit. 8.Turn on time. 9.Rise time. 10.Add efficiency, TD,NR,TR	YP Zhou
2009-10-19	E	1.Add I ² t Inrush Current Transient; 2.Add Short Circuit Surge Transient; 3.Add MTBF data; 4.Update Derating curve under normal input; 5. Add OCP,OVP, OTP, Safety&EMC	YP Zhou
2009-10-23	F	1. Update test condition of MTBF; 2. Update waveform for OVP	YP Zhou
2010-03-02	G	Update mechanical drawing.	JZ Wang
2010-08-09	H	1. Update operating input current, turn on voltage threshold, turn off voltage threshold and input C-L-C filter in input specifications. 2. Update load regulation, output DC current limit and turn on time in output specifications. 3. Add Layout.	JZ Wang
2011-01-17	I	Update the typical efficiency from 93.5% to 94.5% in general specifications and update efficiency data, OTP and layout.	JZ Wang

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2011 Bel Fuse Inc. Specifications subject to change without notice. 011711

15

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com