

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input

0.75 Vdc - 3.63 Vdc/10 A Output

Mar. 19, 2010


Bel Power Inc., a subsidiary of Bel Fuse Inc.

VRBC-10F2Ax

RoHS Compliant

Rev.B

- Non-Isolated
- High Efficiency
- High Power Density
- Fixed Frequency (300kHz)
- OCP/SCP
- Flexible Output Voltage Sequencing
- Over Temperature Protection
- Under-Voltage Lockout (UVLO)
- Wide Input Range
- Wide Trim Range
- Remote On/Off
- Remote Sense
- Converter Can Sink and Source Current
- UL60950-1 Recognized (UL/cUL)

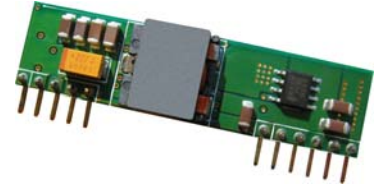

Description

The Bel VRBC-10F2Ax modules are a series of non-isolated dc/dc converters that deliver up to 10 A of output current with full load efficiency of 94% at 3.3 Vdc output. These modules provide precisely regulated voltage programmable via external resistor from 0.75 Vdc to 3.63 Vdc over a wide range of input voltage (2.4 Vdc - 5.5 Vdc). These modules have a sequencing feature that enables designers to implement various types of output voltage sequencing when powering multiple voltages on a board. The open-frame construction and small footprint enable designers to develop cost and space-efficient solutions. Standard features include remote On/Off, remote sense, over current protection, short current protection, wide input, and programmable output voltage.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low	Model Number Active High
0.75 V - 3.63 V ¹	2.4 V - 5.5 V	10 A	36.3 W	94%	VRBC-10F2AL	VRBC-10F2A0

- Notes:** 1. These modules use a buck topology, so the output voltages must be 0.5 V less than the input voltage.
2. Add "G" to the end of the Model Number to indicate Tray Packaging.

Part Number Explanation

V R BC - 10 F 2A x
1 2 3 4 5 6 7

- 1--- Vertical Mount
- 2---RoHS 6, change "R" to "7" means RoHS 5
- 3---Series name, bobcat
- 4---Series code, output current 10A
- 5--- Input range (2.4-5.5V)
- 6---Output voltage, wide trim
- 7---Suffix, "L" mean active low, "0" mean active high

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input

0.75 Vdc - 3.63 Vdc/10 A Output



Mar. 19, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	5.8 V	
Output Enable Terminal Voltage	-0.3 V	-	5.8 V	
Sequencing Voltage ¹	-0.3 V	-	V _{in}	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Notes: All specifications are typical at 25 °C unless otherwise stated.

1. VRBC-10F2Ax series of modules include a sequencing feature that enables users to implement various types of output voltage sequencing in their applications. This is accomplished via an additional sequencing pin. When the sequencing feature is not used, tie the SEQ pin to V_{in} or leave the SEQ pin floating.

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	2.4 V	-	5.5 V	V _{o, set} ≤ V _{in} -0.5 V
Input Current (full load)				
V _o =3.3 V	-	7.0 A	8.06 A	
V _o =1.8 V	-	4.04 A	6.98 A	
V _o =0.75 V	-	1.89 A	4.06 A	
Input Current (no load)	-	80 mA	-	
Remote Off Input Current	-	15 mA	22 mA	
Input Reflected Ripple Current (pk-pk)	-	120 mA	-	Tested with two 100uF/10V tantalum input capacitors (P/N: TPSC107K010R0075 AVX) & simulated source impedance of 1 uH, 5Hz to 20MHz.
Input Reflected Ripple Current (rms)	-	35 mA	-	
I ² t Inrush Current Transient	-	-	0.2 A ² s	
Turn-on Voltage Threshold	-	2.2 V	-	
Turn-off Voltage Threshold	-	2.0 V	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-2%V _{o, set}	-	2%V _{o, set}	V _{in} =5 V, I _o =I _{o max} full load
Output Voltage Set Point	-3%V _{o, set}	-	3%V _{o, set}	Over all operating input voltages, resistive loads and temperature conditions
Load Regulation	-	0.4%V _{o, set}	-	I _o =I _{o min} to I _{o max}
Line Regulation	-	0.3%V _{o, set}	-	V _{in} =V _{in min} to V _{in max}
Regulation Over Temperature (-40 °C to +85 °C)	-	0.5%V _{o, set}	-	T _{ref} =T _{amin} to T _{amax}
Output Current	0 A	-	10 A	
Current Limit Threshold	15 A	-	30 A	

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input

0.75 Vdc - 3.63 Vdc/10 A Output



Mar. 19, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Output Specifications (continued)

Parameter	Min	Typ	Max	Notes
Short Circuit Surge Transient	-	-	2 A ² s	
Ripple and Noise (pk-pk)	-	25 mV	50 mV	Tested with 0-20MHz, 10uF/16V tantalum capacitor & 1uF/10V TDK ceramic capacitor at the output
Ripple and Noise (rms)	-	8 mV	15 mV	
Turn on Time	-	4 mS	8 mS	
Overshoot at Turn on	-	0%Vo,set	3%Vo,set	
Output Capacitance				
ESR ≥ 1mohm	0 uF	-	1000 uF	
ESR ≥ 10mohm	0 uF	-	4700 uF	
Transient Response				
50% ~ 100% Max Load	All	-	200 mV	di/dt=2.5 A/uS; Vin=5 V; and with 10 uF/16 V tantalum capacitor & 1uF/10V ceramic capacitor at the output
Settling Time		-	25 uS	
100% ~ 50% Max Load		-	200 mV	
Settling Time		-	25 uS	
50% ~ 100% Max Load	All	-	120 mV	di/dt=2.5 A/uS; Vin=5 V; and with two 150 uF/10 V tantalum capacitors & 1 uF/10 V ceramic capacitor at the output
Settling Time		-	50 uS	
100% ~ 50% Max Load		-	120 mV	
Settling Time		-	50 uS	

Note: All specifications are typical at nominal input (Vin=5 V), full load at 25 °C unless otherwise stated.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=5 V, full load (current source)
Vo=3.3 V	91%	94%	-	
Vo=1.8 V	86%	89%	-	
Vo=0.75 V	77%	80%	-	
Switching Frequency	250 kHz	300 kHz	350 kHz	
Over Temperature Shutdown	-	125 °C	-	
Output Trim Range (Wide Trim)	0.7525 V	-	3.63 V	Total adjustment of trim, setpoint and remote sense combined should not exceed 3.63 V. Vo=0.7525 V when trim pin open
Remote Sense Compensation	-	-	10%	
MTBF	6,900,000 hours			Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25°C)
Dimensions				
Inches (L × W × H)	2.0 x 0.5 x 0.36			
Millimeters (L × W × H)	50.8 x 12.7 x 9.2			
Weight	-	8.3g	-	

Note: All specifications are typical at 25°C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input

0.75 Vdc - 3.63 Vdc/10 A Output



Mar. 19, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.


Control Specifications

Parameter	Min	Typ	Max	Notes
Signal Low (Unit Off)	-0.3 V	-	0.3 V	VRBC-10F2A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	1.5 V	-	5.8 V	
Signal Low (Unit On)	-0.3 V	-	0.3 V	VRBC-10F2AL; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	1.5 V	-	5.8 V	
Sequencing Voltage	0.05 V	-	V _{in}	Sequencing Voltage applied on SEQ should be higher than output voltage.
Sequencing Slew Rate Capability	-	-	2 V/mS	
Sequencing Delay Time	10 mS	-	-	Delay from V _{in} , min to application of voltage on SEQ pin
Tracking Accuracy	Power-Up	-	100mV	
	Power-Down	-	200mV	

Output Trim Equations


Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{21.07}{V_{adj} - 0.7525} - 5.11$$

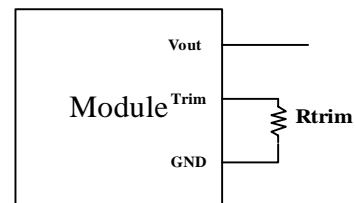

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$V_{rim} = 0.7 - 0.1698 \times (V_{adj} - 0.7525)$$

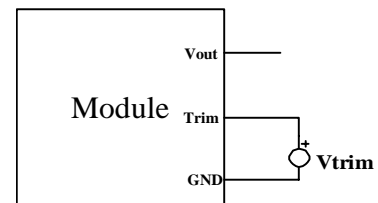

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input


0.75 Vdc - 3.63 Vdc/10 A Output




Mar. 19, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.


Efficiency Data

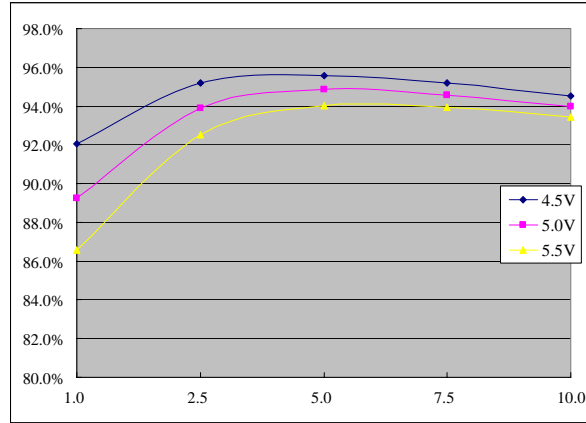

Vo=3.3 V

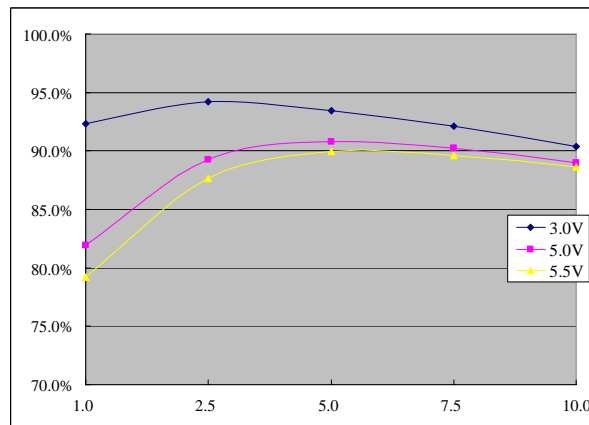

Vo=1.8 V

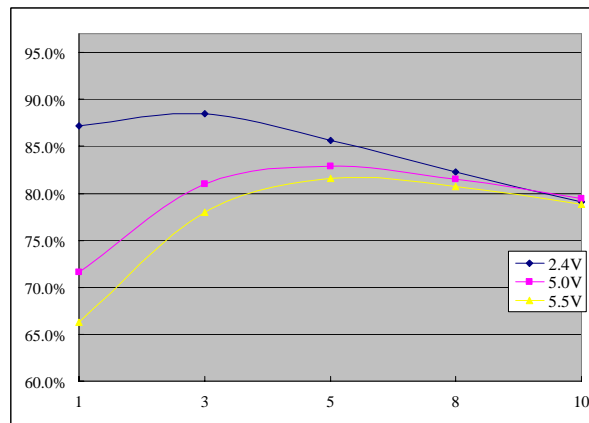

Vo=0.75 V

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input


0.75 Vdc - 3.63 Vdc/10 A Output




Mar. 19, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.


Thermal Derating Curves

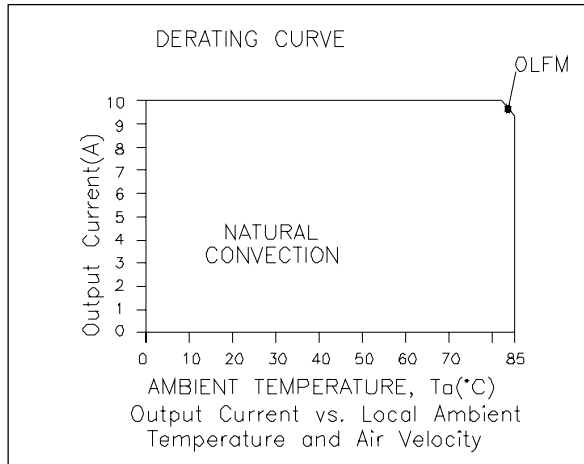


$V_{in}=5.0\text{ V}$, $V_o=3.3\text{ V}$

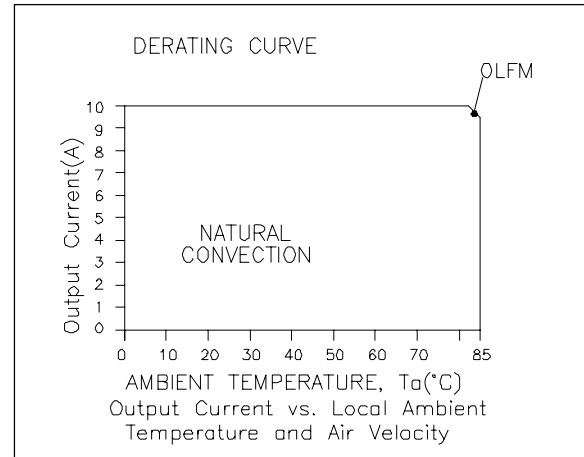

$V_{in}=5.0\text{ V}$, $V_o=1.8\text{ V}$

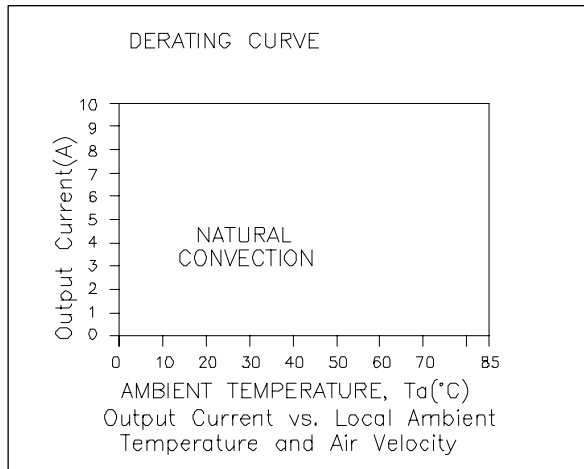

$V_{in}=5.0\text{ V}$, $V_o=0.75\text{ V}$

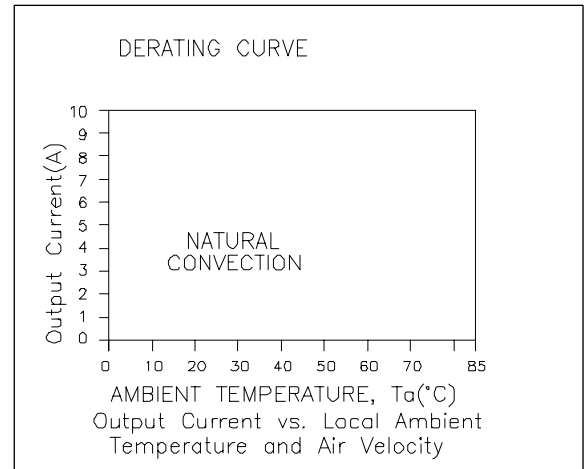

$V_{in}=3.3\text{ V}$, $V_o=0.75\text{ V}/1.8\text{ V}/2.5\text{ V}$

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input


0.75 Vdc - 3.63 Vdc/10 A Output




Mar. 19, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.


Ripple and Noise Waveforms

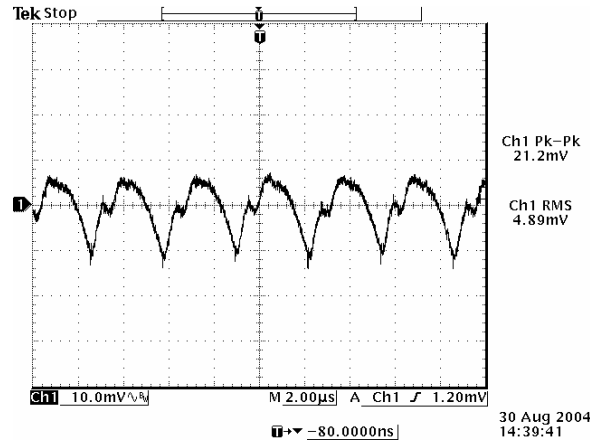

Vin=5 V, Vo=0.75 V

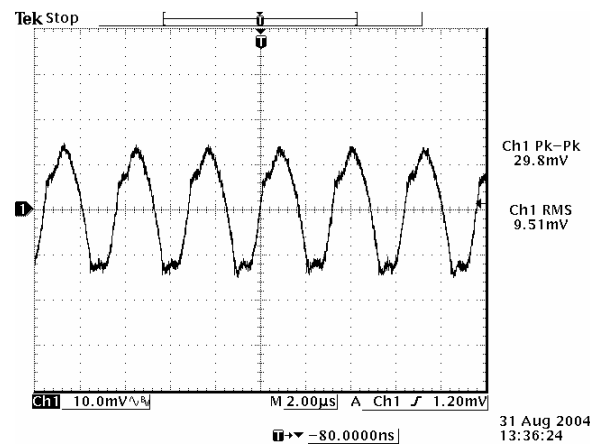

Vin=5 V, Vo=1.8 V

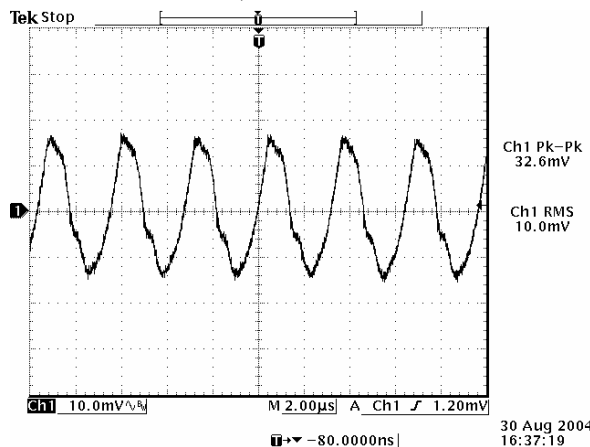

Vin=5 V, Vo=3.3 V

Note: Ripple and noise tested at 0-20 MHz BW, 10 μ F/16 V tantalum capacitor and 1 μ F/10 V ceramic capacitor, full load, and Ta=25 deg C.

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input



0.75 Vdc - 3.63 Vdc/10 A Output



Mar. 19, 2010



Bel Power Inc., a subsidiary of Bel Fuse Inc.

Transient Response Waveforms

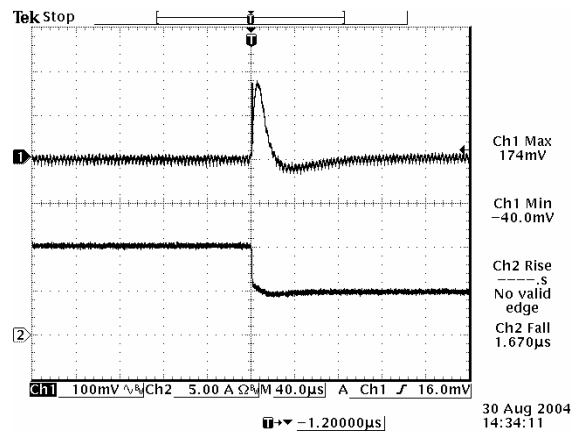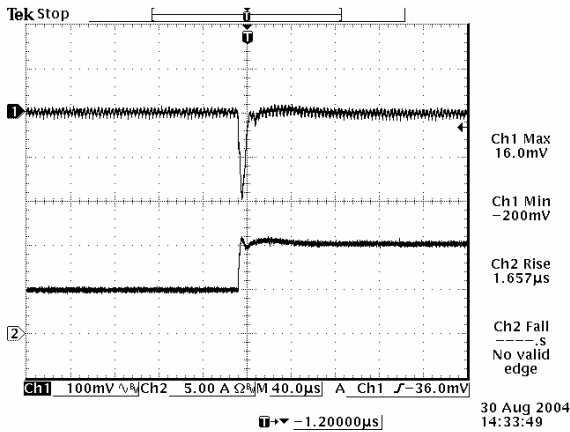



50% to 100% load step at $V_{in}=5\text{ V}$, $V_o=0.75\text{ V}$

100% to 50% load step at $V_{in}=5\text{ V}$, $V_o=0.75\text{ V}$

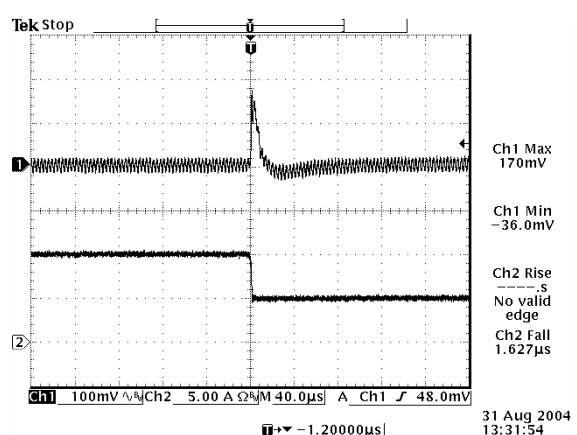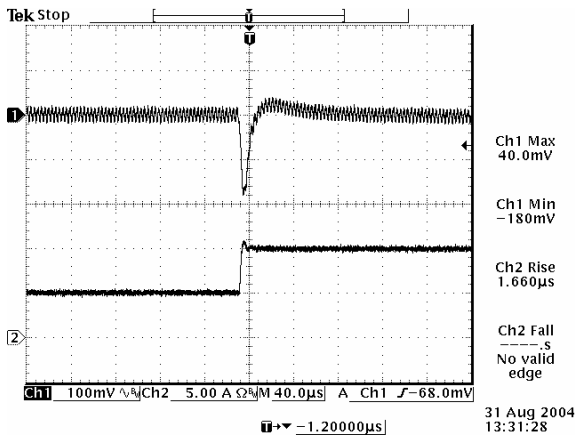

50% to 100% load step at $V_{in}=5\text{ V}$, $V_o=1.8\text{ V}$

100% to 50% load step at $V_{in}=5\text{ V}$, $V_o=1.8\text{ V}$

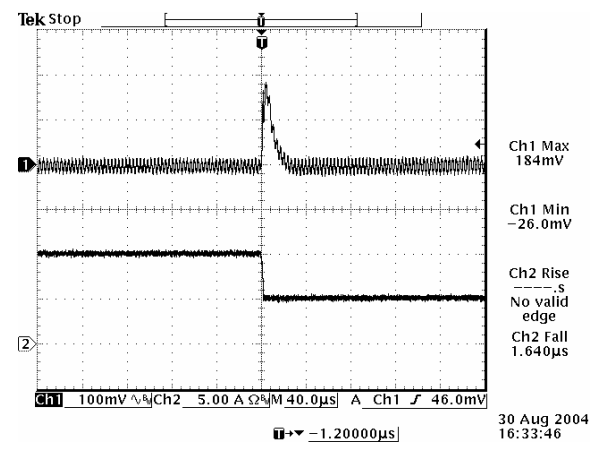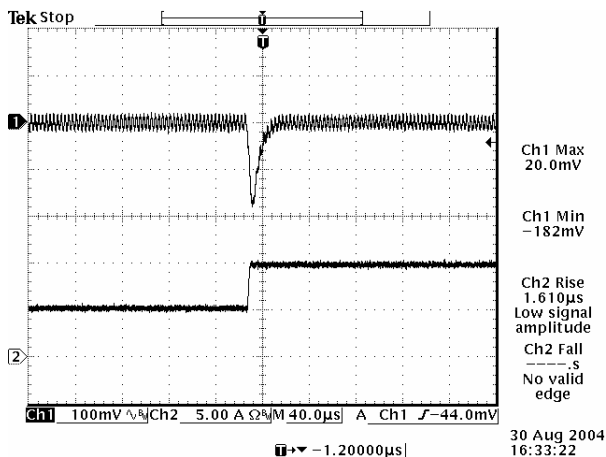

50% to 100% load step at $V_{in}=5\text{ V}$, $V_o=3.3\text{ V}$

100% to 50% load step at $V_{in}=5\text{ V}$, $V_o=3.3\text{ V}$

Note: Transient response tested at $di/dt=2.5\text{ A}/\mu\text{S}$, with 10 $\mu\text{F}/16\text{ V}$ Tantalum capacitor and 1 $\mu\text{F}/10\text{ V}$ ceramic capacitor, and $T_a=25\text{ deg C}$.

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input




0.75 Vdc - 3.63 Vdc/10 A Output



Mar. 19, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Mechanical Outline

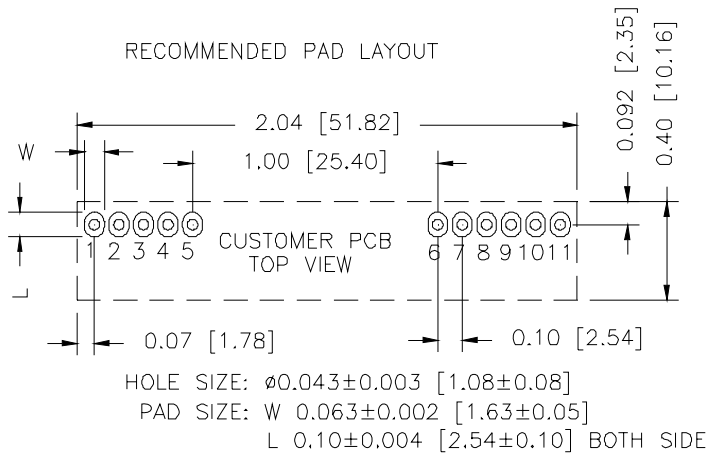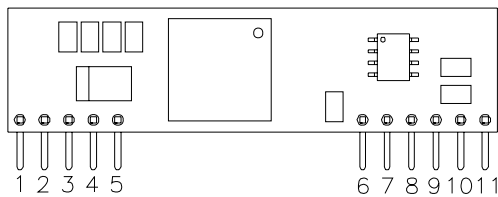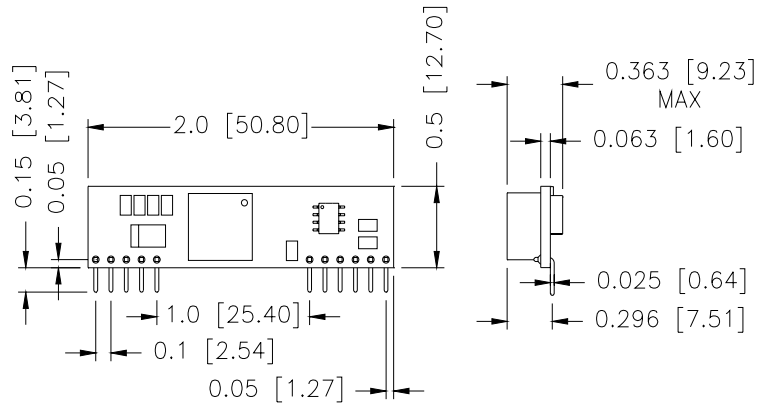

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Remote Sense
4	Vout
5	Ground
6	Ground
7	Vin
8	Vin
9	SEQ
10	Trim
11	Remote On/Off

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input

0.75 Vdc - 3.63 Vdc/10 A Output



Mar. 19, 2010

Bel Power Inc., a subsidiary of Bel Fuse Inc.

Revision History

Date	Revision	Changes Detail	Approval
2010-3-19	B	1. Change to new datasheet format; 2. Add part number explanation.	XF

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2010 Bel Fuse Inc. Specifications subject to change without notice. 031910

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com