

NON-ISOLATED DC/DC CONVERTERS

10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A



Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

SRXA-40AQ1L

RoHS Compliant

Rev.C

Features

- Non-Isolated
- High Efficiency
- Fixed Frequency
- High Power Density
- Wide Input
- Class 1, Category 2, Non-Isolated DC/DC Converter (refer to IPC-9592)
- Low Cost
- Under Voltage Lockout
- OCP/SCP
- Remote On/Off
- Wide Operating Temperature Range

Applications

- Networking
- Computers and peripherals
- Telecommunications

Description

The Bel SRXA-40AQ1L is part of the non-isolated dc/dc converter Power Module series. The modules use a SMT package. These converters provide 4 outputs: 1.23 Vdc/6 A, 2.5 Vdc/1.5 A, 3.3 Vdc/1.5 A and -12 Vdc/2 A over a wide range of input voltage ($V_{in} = 10.8 - 13.2$ Vdc). The efficiency is typically 91% @ 12Vin at full load.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low
1.23/ 2.5/ 3.3/ -12 Vdc	10.8 Vdc - 13.2 Vdc	6/ 1.5/ 1.5/ 2 A	40 W	91%	SRXA-40AQ1L

Notes: Add "G" suffix at the end of the model number to indicate Tray Packaging.

Part Number Explanation

$\frac{S}{1} \frac{R}{2} \frac{XA}{3} - \frac{40}{4} \frac{A}{5} \frac{Q1}{6} \frac{L}{7}$

- 1---Surface mount
- 2---RoHS 6, change "R" to "7" means RoHS 5
- 3---Series name
- 4---Series code
- 5--- Narrow input range (10.8-13.2V)
- 6---Output voltage, Quad
- 7---Enable, active low

NON-ISOLATED DC/DC CONVERTERS

10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A



Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Unit	Notes
Continuous non-operating Input Voltage	-0.3	-	15	V	
Remote On/Off	-0.3	-	15	V	
Ambient Temperature	-40	-	85	°C	
Storage Temperature	-55	-	125	°C	

Note: Ratings used beyond the maximum ratings may cause a reliability degradation of the converter or may permanently damage the device.

Input Specifications

Parameter	Min	Typ	Max	Unit	Notes
Operating Input Voltage	10.8	12	13.2	V	
Input Current (full load)	-	-	5	A	
Input Current (no load)	-	80	150	mA	
Remote Off Input Current	-	10	-	mA	
Input Reflected Ripple Current (rms)	-	10	20	mA	Use a 1000uF AL-Cap on the input
Input Reflected Ripple Current (pk-pk)	-	50	80	mA	
I ² t Inrush Current Transient	-	-	1	A ² s	
Turn-on Voltage Threshold	-	10.5	-	V	
Turn-off Voltage Threshold	-	9.5	-	V	

CAUTION: This converter is not internally fused. An input line fuse must be used in application.

Recommend a fast-acting fuse with maximum rating of 8A on system board. Refer to the fuse manufacturer's datasheet for further information.

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Unit	Notes
Output Voltage Set Point	-2	-	2	% Vo,set	Vin=12V, Iout=half load
Load Regulation	-	-	1	% Vo,set	
Line Regulation	-	-	1	% Vo,set	
Regulation Over Temperature (-40deg.C-85deg.C)	-	-	1	% Vo,set	
Ripple and Noise (pk-pk)					0-20MHz BW, minimum extra output ceramic caps on output
Vo=1.23V	-	30	-	mV	
Vo=2.5V	-	30	-	mV	
Vo=3.3V	-	30	-	mV	
Vo=-12V	-	40	-	mV	
Ripple and Noise (rms)					
Vo=1.23V	-	5	-	mV	
Vo=2.5V	-	5	-	mV	
Vo=3.3V	-	5	-	mV	
Vo=-12V	-	8	-	mV	

NON-ISOLATED DC/DC CONVERTERS

10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A



Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Output Specifications (continued)

Parameter	Min	Typ	Max	Unit	Notes		
Output Current Range							
Vo=1.23V	0	-	6	A			
Vo=2.5V	0	-	1.5	A			
Vo=3.3V	0	-	1.5	A			
Vo=-12V	0	-	2	A			
Output DC Current Limit ¹	-	150	-	%Iout			
Short Circuit Surge Transient	-	1	3	A ² s			
Turn on Time	-	8	12	mS			
Overshoot at Turn on	-	-	5	%			
Output Capacitance							
Vo=1.23V	330	-	560	uF			
Vo=2.5V	220	-	470	uF			
Vo=3.3V	80	-	220	uF			
Vo=-12V	22	-	100	uF			
Transient Response							
ΔV 50%~75% of Max Load	Overshoot	Vo= 1.23V	-	50	100	mV	di/dt=0.5A/us, Vin=12.0Vdc, Ta=25°C, minimum extra output ceramic caps on output
	Settling Time		-	-	150	uS	
ΔV 75%~50% of Max Load	Overshoot	Vo= 2.5V	-	50	100	mV	
	Settling Time		-	-	150	uS	
ΔV 50%~75% of Max Load	Overshoot	Vo= 3.3V	-	50	100	mV	
	Settling Time		-	-	150	uS	
ΔV 75%~50% of Max Load	Overshoot	Vo= -12V	-	50	100	mV	
	Settling Time		-	-	150	uS	
ΔV 50%~75% of Max Load	Overshoot	Vo= -12V	-	200	400	mV	
	Settling Time		-	-	150	uS	
ΔV 75%~50% of Max Load	Overshoot	Vo= -12V	-	200	400	mV	
	Settling Time		-	-	150	uS	

- Notes:**
1. All outputs is shutdown latched when 3.3V, 2.5V, 1.23V output happen overload. Hiccup mode is active during -12V output overload but 3.3V, 2.5V and 1.23V don't be affected operating.
 2. All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A



Sep. 22, 2009


Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

General Specifications

Parameter	Min	Typ	Max	Unit	Notes
Efficiency	-	91	-	%	Vin=12.0V, full load
Switching Frequency	-	300	-	kHz	
Weight	-	14	-	g	
FIT	TBD			-	Calculated Per Bell Core SR-332 (Io=80%load, Ta = 25 °C, FIT=10 ⁹ /MTBF)
Dimensions				-	
Inches (L x W x H)	1.77 x 0.90 x 0.49				
Millimeters (L x W x H)	45.00 x 22.86 x 12.39				

Note: All specifications are typical at 25 °C unless otherwise stated.

Efficiency Data

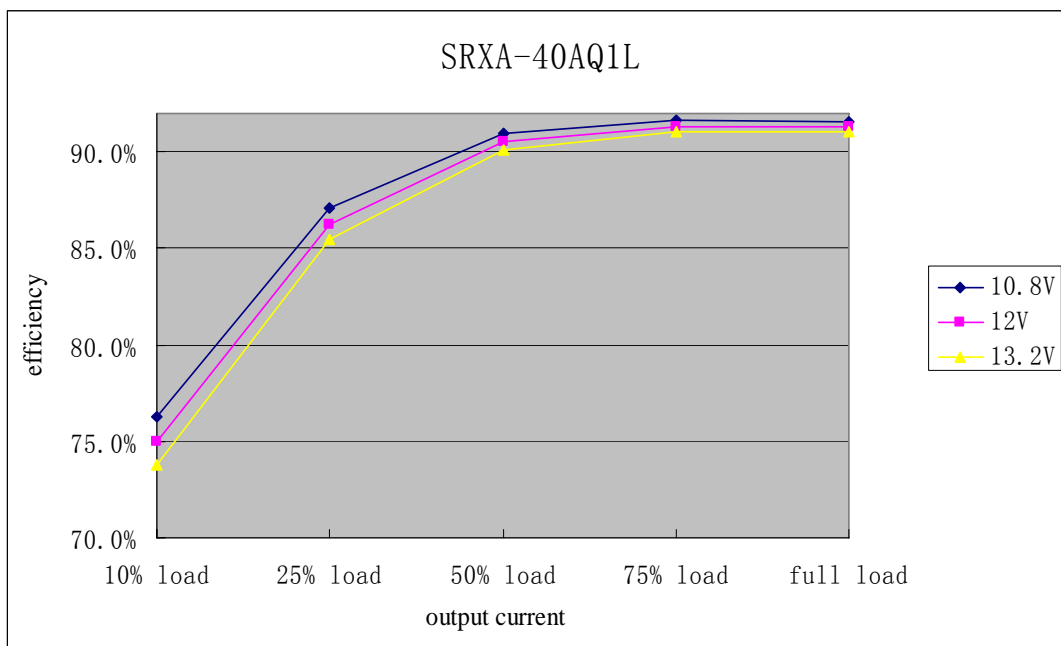

NON-ISOLATED DC/DC CONVERTERS


10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A




Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Thermal Derating Curves

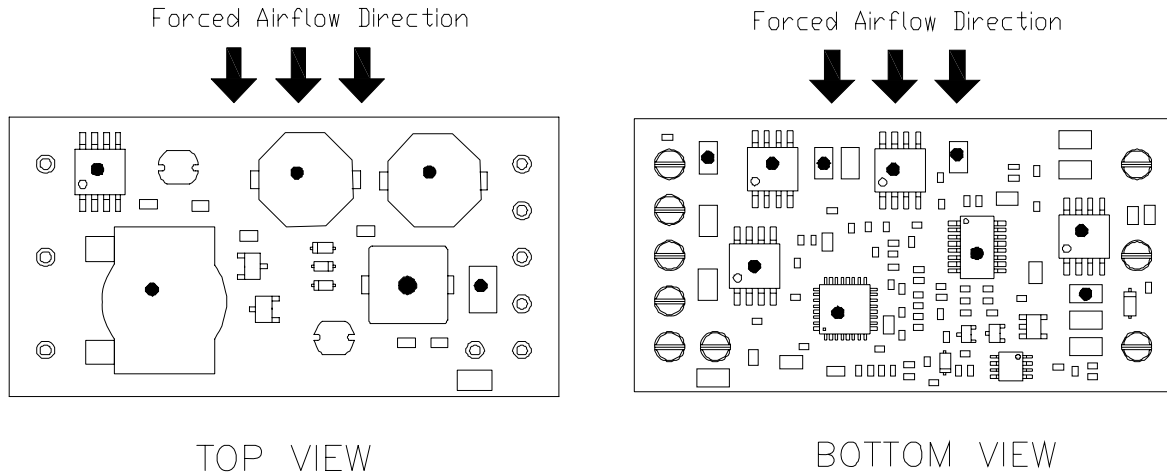

The thermal reference point is shown above. For reliable operation this temperature should not exceed 110°C. The output power of the module should not exceed the rated power for the module.

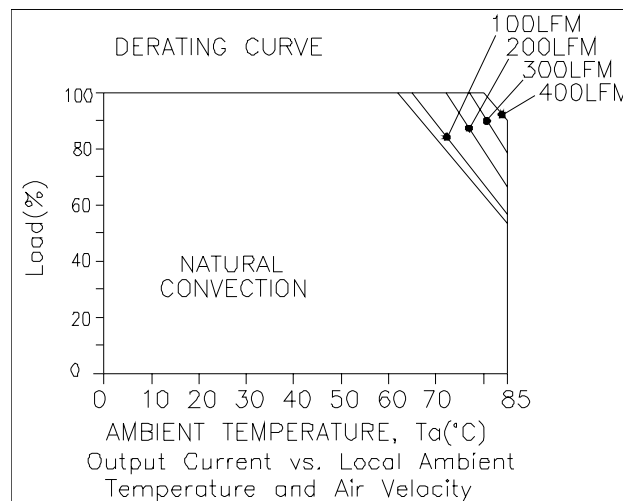

Derating curve under normal input

Maximum junction temperature of semiconductors derated to 120 degree C.

NON-ISOLATED DC/DC CONVERTERS


10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A




Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Ripple and Noise Waveform

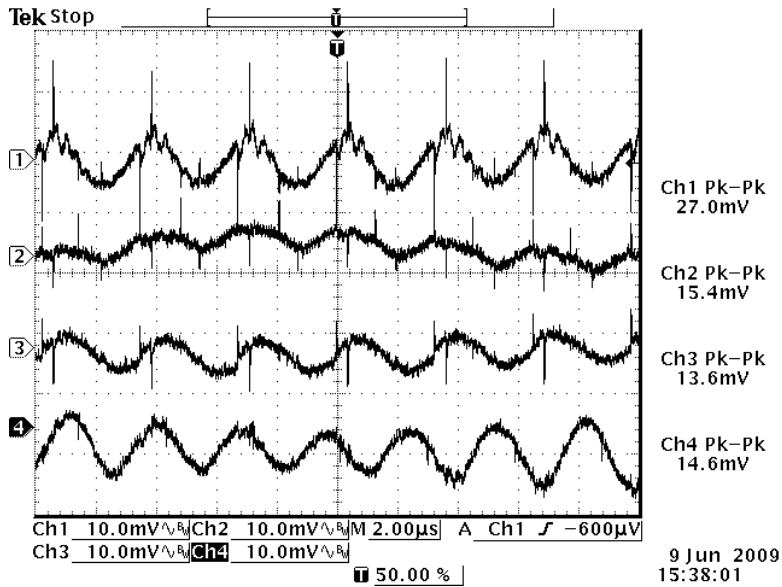

Transient Response Waveforms

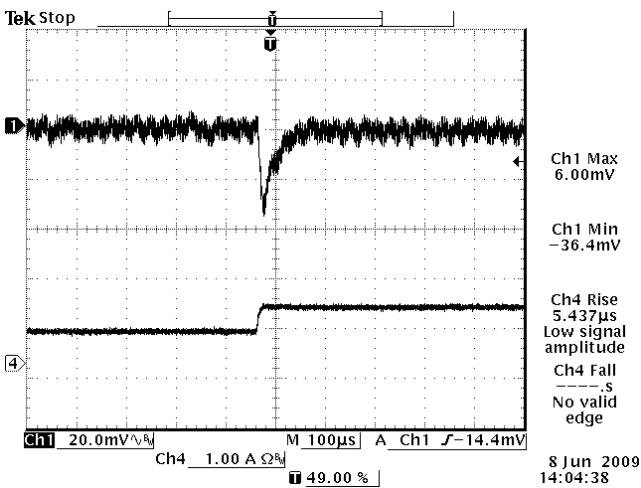

3.3Vout 50%-75%load 0.5A/us

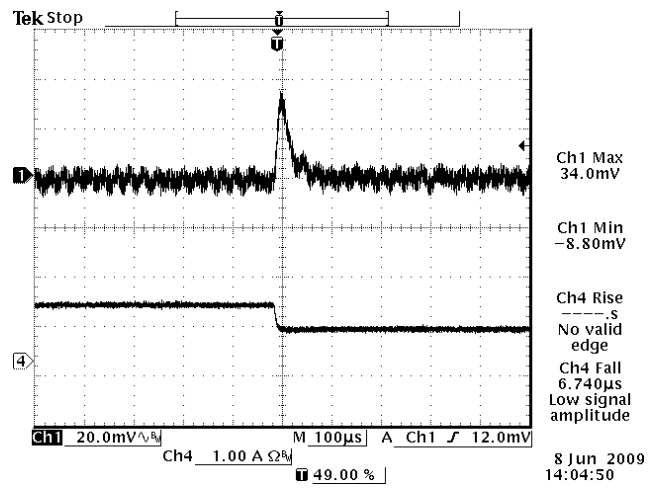

3.3Vout 75%-50%load 0.5A/us

NON-ISOLATED DC/DC CONVERTERS


10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A




Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Transient Response Waveforms (continued)

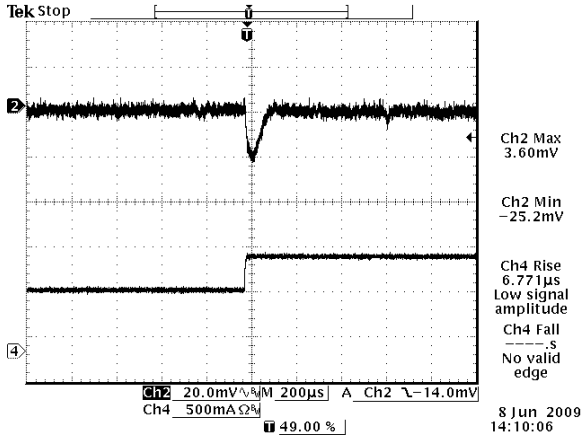


2.5Vout 50%-75%load 0.5A/us

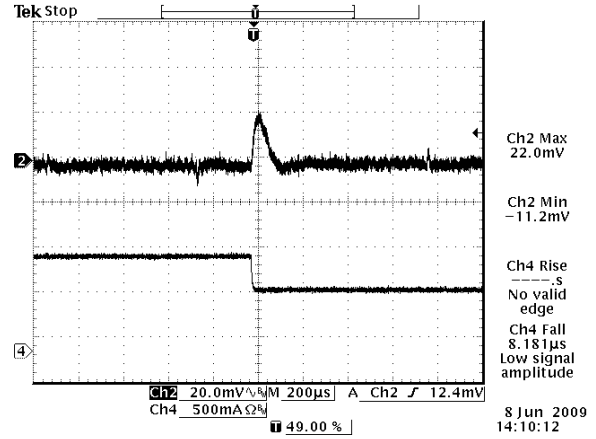


2.5Vout 75%-50%load 0.5A/us

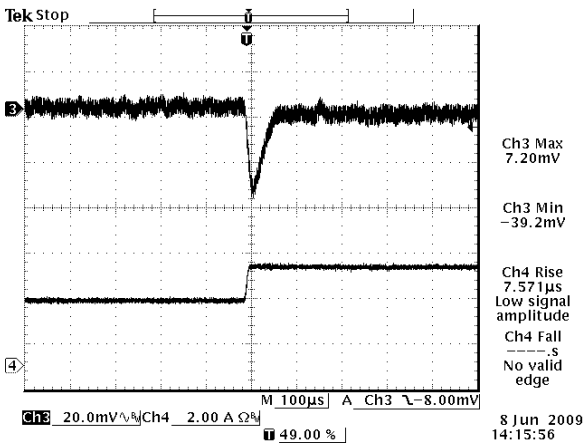


1.23Vout 50%-75%load 0.5A/us

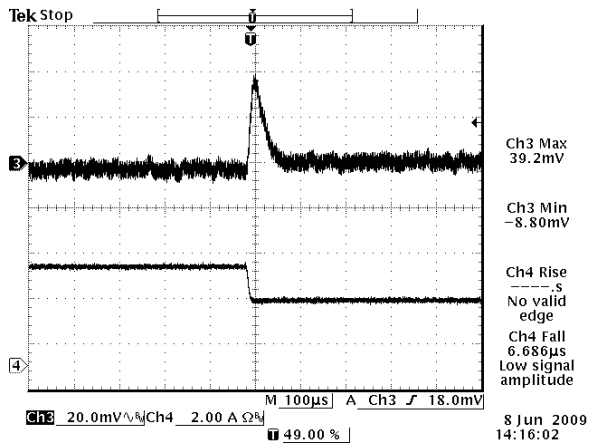

1.23Vout 75%-50%load 0.5A/us

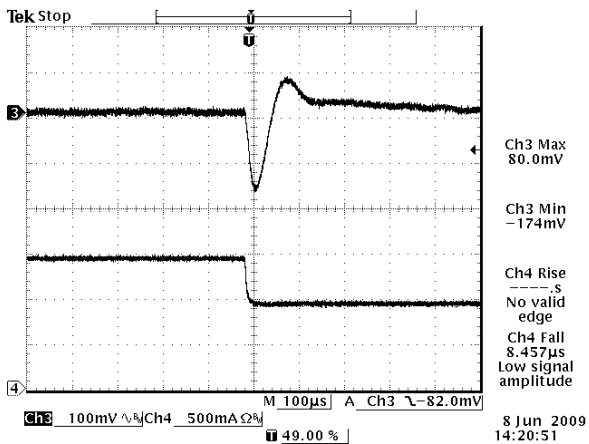

-12Vout 50%-75%load 0.5A/us

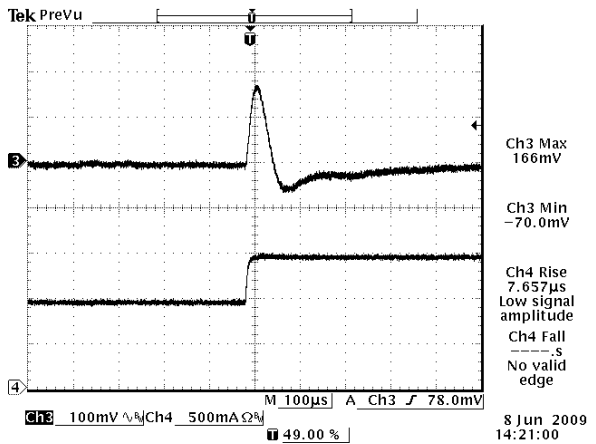

-12Vout 75%-50%load 0.5A/us

NON-ISOLATED DC/DC CONVERTERS

10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A




Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Startup & Shutdown

Rise time

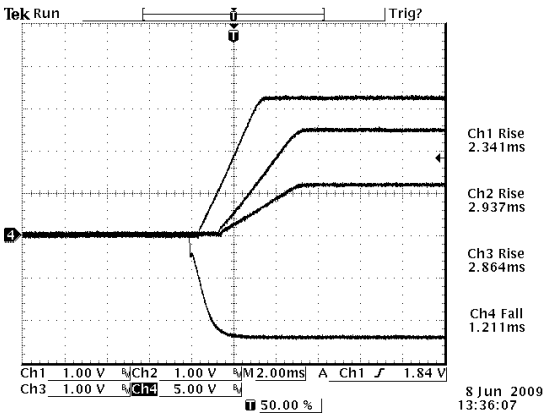


Test Condition:
Vin=12V, full load output

Startup time

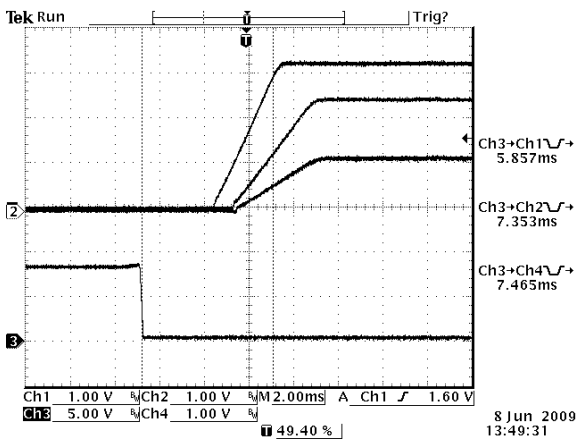


Startup from on/off
Ch1, Ch2, Ch4: 1.23Vout, 2.5Vout, 3.3Vout
Ch3: on/off controller
Vin=12V, full load output

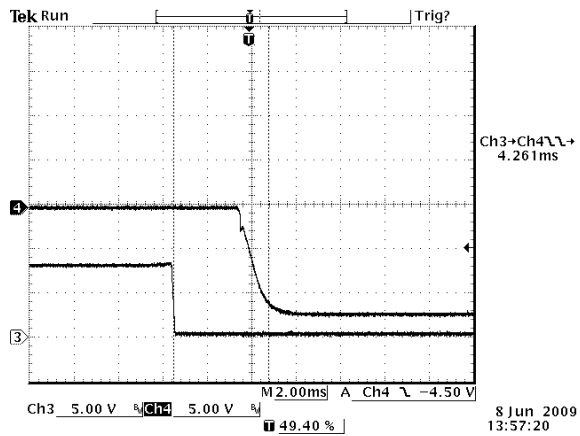

Startup from on/off
Ch4: -12Vout
Ch3: on/off controller
Vin=12V, full load output

Shutdown

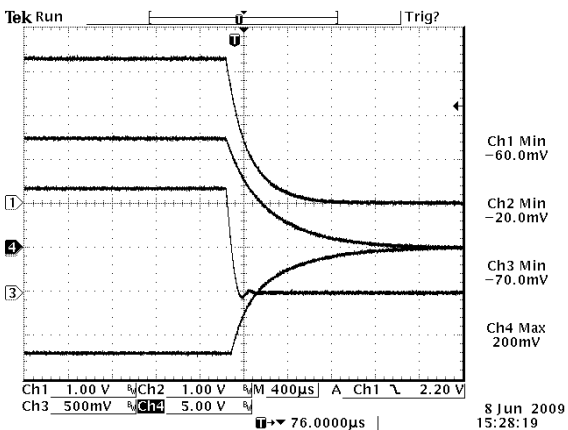

Test Condition:
Vin=12V, full load output

NON-ISOLATED DC/DC CONVERTERS

10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A




Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Remote On/Off

Parameter		Min	Typ	Max	Unit	Notes
Signal Low (Unit On)	Active Low	-0.3	-	1	V	The remote on/off pin open, Unit off.
Signal High (Unit Off)		2.5	-	V _{in}	V	
Current Sink		0	-	1	mA	


Recommended remote on/off circuit for active low

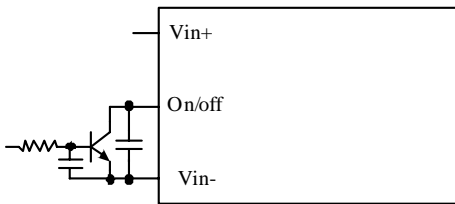


Control with open collector/drain circuit

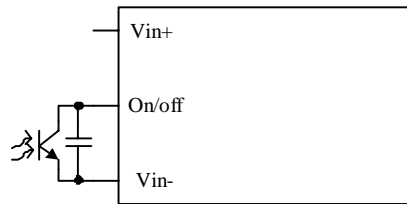

Control with photocoupler circuit

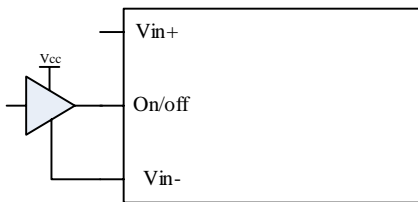


Control with logic circuit

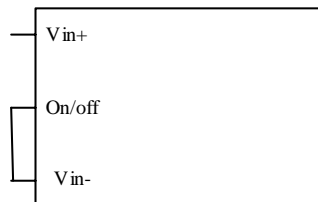

Permanently on

Input Under-voltage Lockout

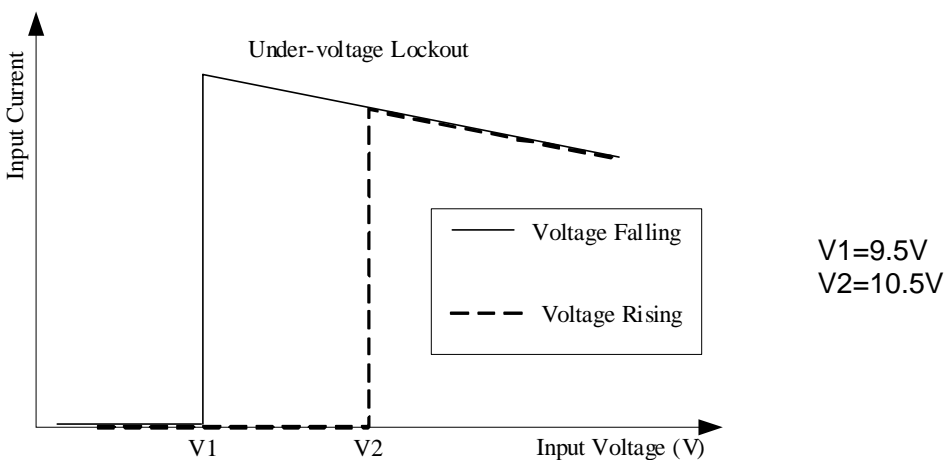

NON-ISOLATED DC/DC CONVERTERS


10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A



Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Power Sequence

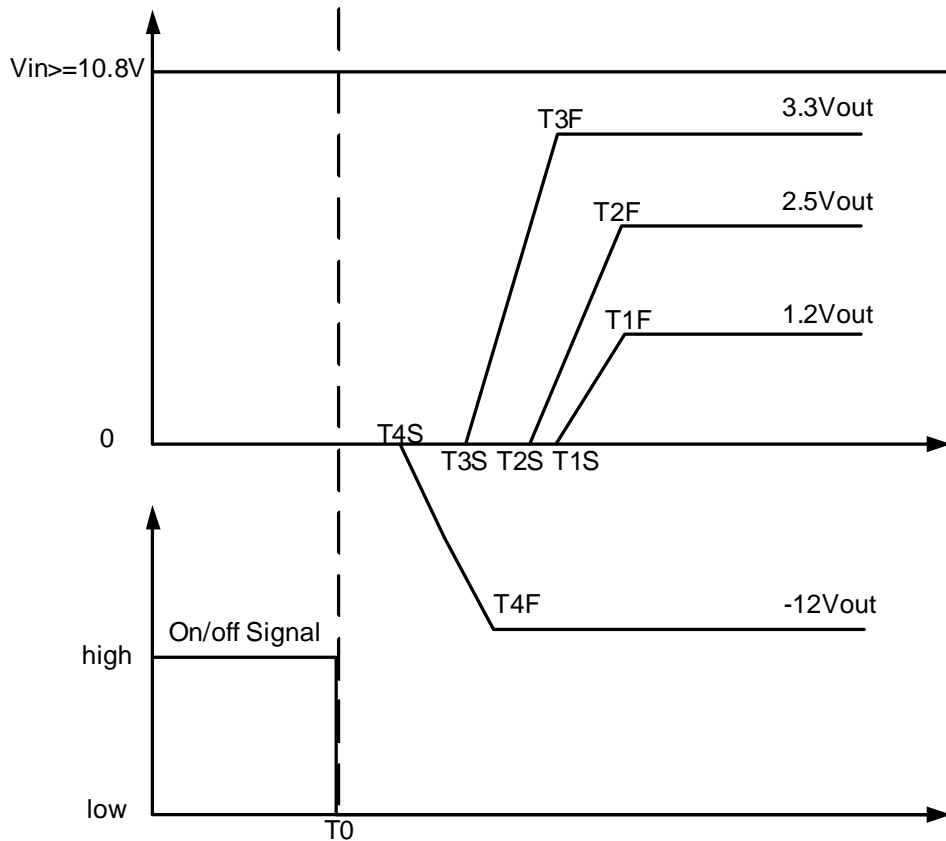

$T1F - T0 < 12mS$
 $T4F - T0 < 5mS$
 $T1S - T3S < 10mS$
 $Max(T3F, T2F, T1F) - T3S < 10mS$
 $Max[(T3F - T3S), (T2F - T2S), (T1F - T1S)] < 5mS$
 $Min[3.3V / (T3F - T3S), 2.5V / (T2F - T2S), 1.2V / (T1F - T1S)] < 100mV/us$
 $3.3V_{out}(t) > 2.5V_{out}(t) > 1.2V_{out}(t), \text{ when } t > T3S$

NON-ISOLATED DC/DC CONVERTERS


10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A



Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Fundamental Circuit Diagram

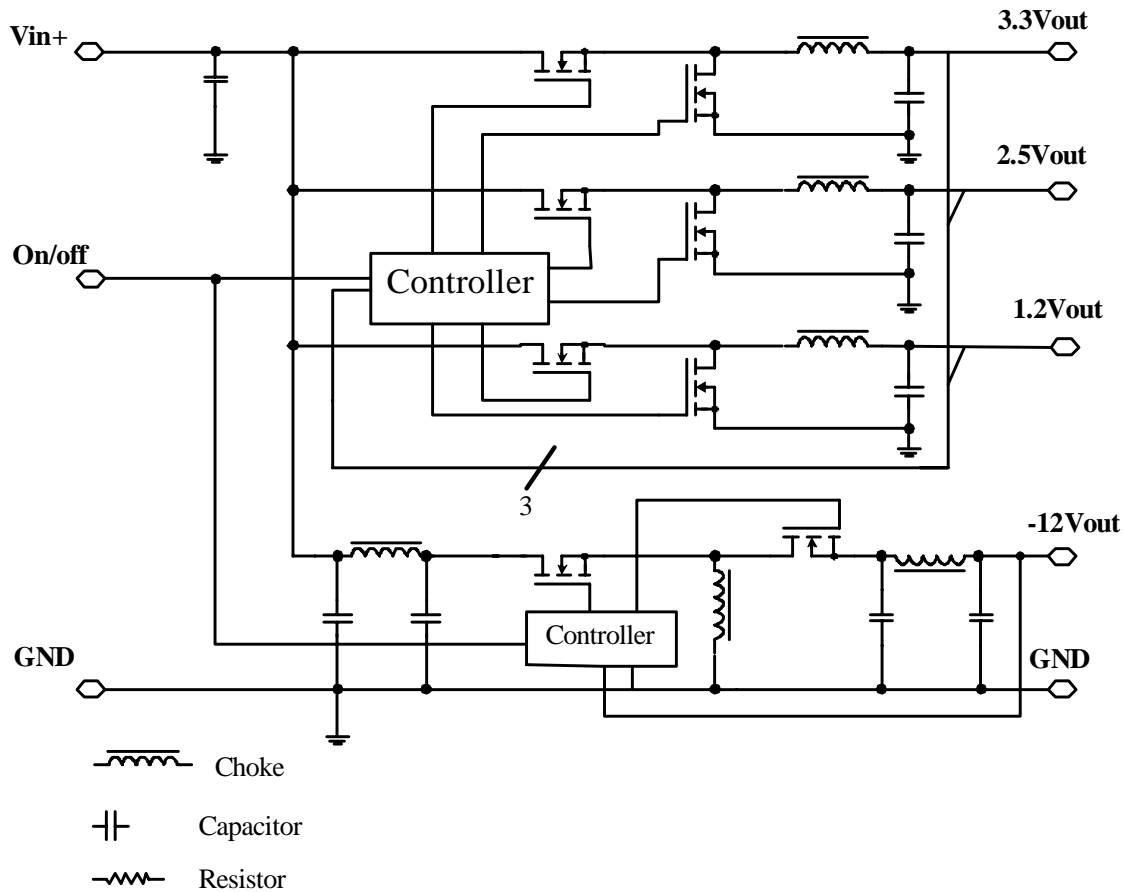

NON-ISOLATED DC/DC CONVERTERS


10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A




Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Layout

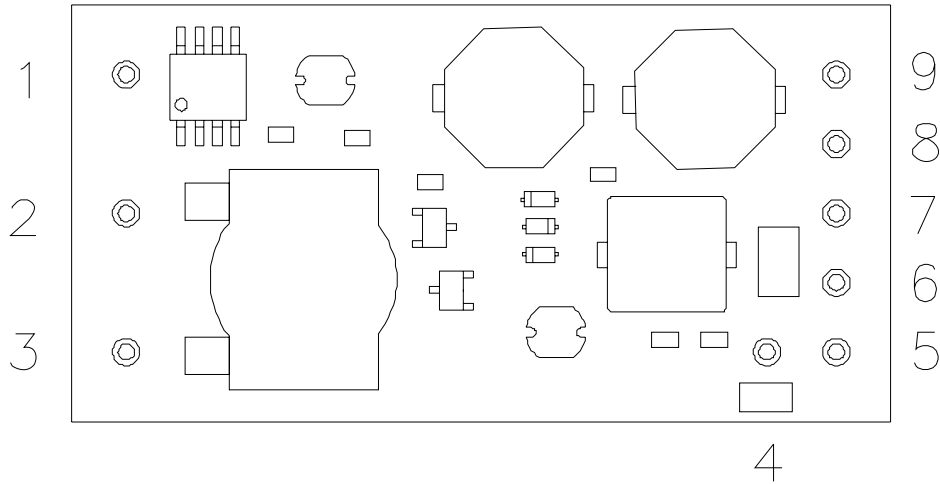

Layout of components on top side

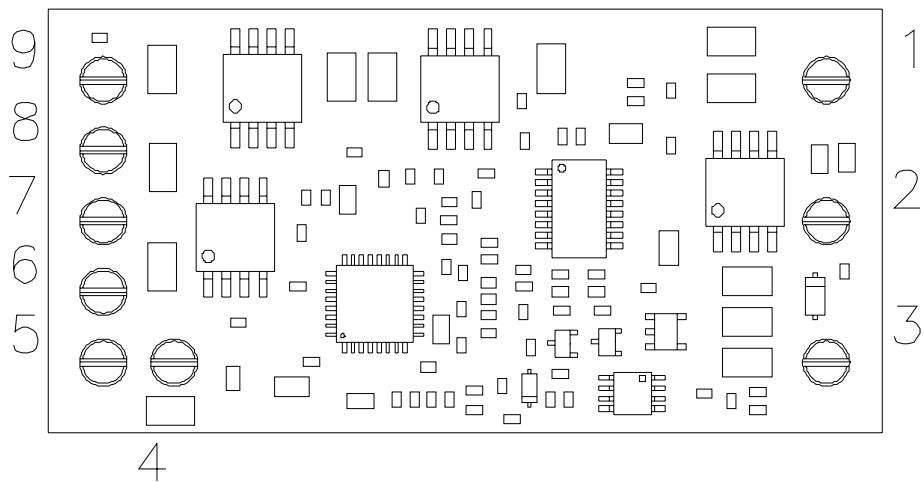

Layout of components on bottom side

NON-ISOLATED DC/DC CONVERTERS


10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A



Sep. 22, 2009

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Mechanical Outline

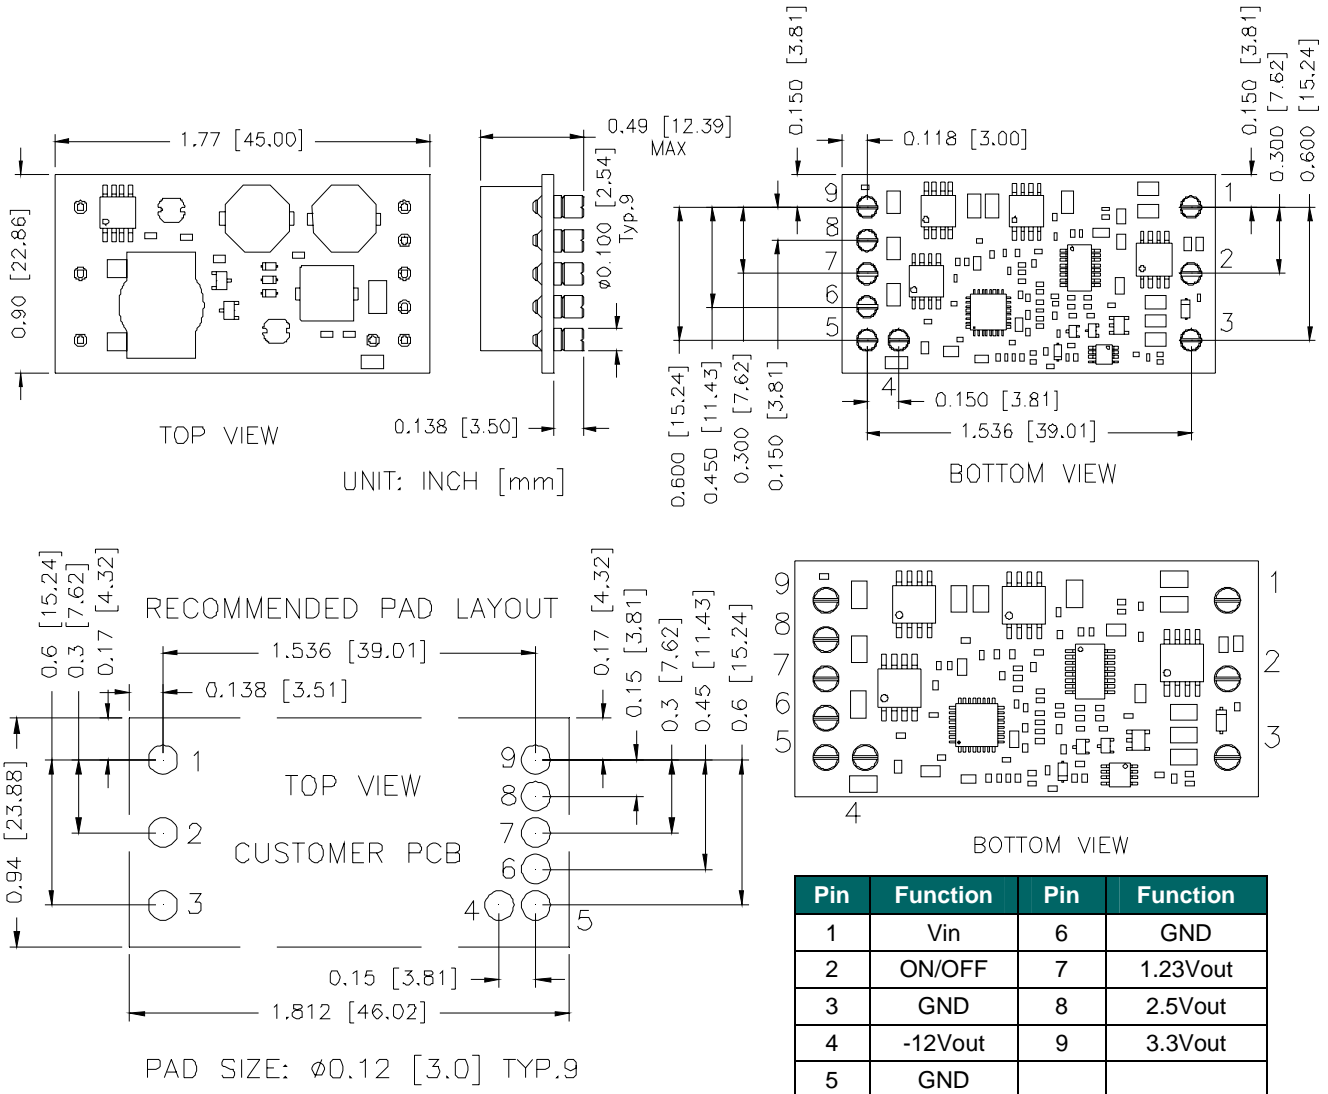

Note: This module is recommended and compatible with Pb-Free Reflow Soldering and must be soldered using a reflow profile with a peak temperature of no more than 260 °C for less than 5 seconds.

Note:

- 1) All Pins: Material - Copper Alloy;
Finish – 3 micro inches minimum Gold over 50 micro inches minimum Nickel plate.
- 2) Undimensioned components are shown for visual reference only.
- 3) All dimensions in inches (mm); Tolerances: x.xx +/-0.02 in. (x.x +/-0.5mm) x.xxx +/-0.010 in. (x.xx +/-0.25mm).

NON-ISOLATED DC/DC CONVERTERS

10.8 Vdc - 13.2 Vdc Input, 1.23, 2.5, 3.3, -12 Vdc/6, 1.5, 1.5, 2 A



Sep. 22, 2009

Bel Power, Inc. , a subsidiary of Bel Fuse, Inc.

Revision History

Date	Revision	Changes Detail	Approval
2009-04-16	A	First release	HL Lu
2009-07-20	B	1. Input specs: Update no load current and remote off current, ripple current (pk-pk), turn on/off voltage; 2. Output specs: Update load/line regulation, ripple and noise, transient response, turn on time, output cap, weight, add note for OCP; 3. Add efficiency curve, thermal derating, NR, TR, startup & shutdown; 4. Update remote on/off, UVLO, SEQ, MD	HL Lu
2009-09-22	C	1. Modify output voltage 2. Update efficiency data and MD 3. Add SCH and Layout	HL Lu

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2009 Bel Fuse Inc. Specifications subject to change without notice. 092209

14

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com