

IN Series



- Regulated Dual Output
- DIP-24 Package
- 1000 VDC Isolation
- Optional Isolation Up To 6000 VDC
- Continuous Short Circuit Protection
- MTBF >3 MHRs
- 3 Year Warranty

Specification

Input

- Input Voltage Range • Nominal $\pm 10\%$
- Input Filter • Pi network
- Input Reflected Ripple Current • 35 mA pk-pk through 12 μ H inductor 5 Hz to 20 MHz
- Input Reverse Voltage Protection • None

Output

- Output Voltage • See table
- Minimum Load • None ⁽²⁾
- Voltage Balance • $\pm 1\%$
- Line Regulation • $\pm 0.5\%$ max
- Load Regulation • $\pm 0.5\%$ max
- Setpoint Accuracy • $\pm 2\%$ max
- Ripple & Noise • 75 mV pk-pk max, 20 MHz bandwidth
- Temperature Coefficient • $0.02\%/^{\circ}\text{C}$
- Short Circuit Protection • Continuous with auto recovery (foldback)
- Maximum Capacitive Load • $\pm 1000 \mu\text{F}$ for $\pm 5 \text{ V}$ output
 $\pm 470 \mu\text{F}$ for $\pm 9 \text{ V}$ to $\pm 15 \text{ V}$ output
 $\pm 220 \mu\text{F}$ for $\pm 24 \text{ V}$ output

General

- Efficiency • See table
- Isolation Voltage • 1000 VDC (6000 VDC max, see note 1)
- Isolation Resistance • $10^9 \Omega$
- Isolation Capacitance • 60 pF typical
- Switching Frequency • 350 kHz typical
- MTBF • >3 MHRs to MIL-HDBK-217F at 25 μC , GB

Environmental


- Operating Temperature • -40°C to $+85^{\circ}\text{C}$
- Storage Temperature • -40°C to $+125^{\circ}\text{C}$
- Case Temperature • $+100^{\circ}\text{C}$ max
- Cooling • Convection-cooled

Notes

1. Add suffix '-H' to model number for 3 kVDC isolation, '-H4' for 4 kVDC isolation, '-H5' for 5.2 kVDC isolation and '-H6' for 6 kVDC isolation.
2. Operation at no load will not damage unit but it may not meet all specifications.
3. All dimensions in inches (mm).
4. Pin pitch tolerance: ± 0.014 (± 0.35)
5. Case tolerance: ± 0.02 (± 0.5)
6. Weight: 0.02 lbs (12.2 g)

Input Voltage	Output Voltage	Output Current	Efficiency	Model Number ⁽¹⁾
5 VDC	$\pm 5.0 \text{ V}$	$\pm 150 \text{ mA}$	65%	IN0505D
	$\pm 9.0 \text{ V}$	$\pm 84 \text{ mA}$	67%	IN0509D
	$\pm 12.0 \text{ V}$	$\pm 63 \text{ mA}$	70%	IN0512D
	$\pm 15.0 \text{ V}$	$\pm 50 \text{ mA}$	67%	IN0515D
	$\pm 24.0 \text{ V}$	$\pm 32 \text{ mA}$	66%	IN0524D
12 VDC	$\pm 5.0 \text{ V}$	$\pm 150 \text{ mA}$	68%	IN1205D
	$\pm 9.0 \text{ V}$	$\pm 84 \text{ mA}$	70%	IN1209D
	$\pm 12.0 \text{ V}$	$\pm 63 \text{ mA}$	75%	IN1212D
	$\pm 15.0 \text{ V}$	$\pm 50 \text{ mA}$	72%	IN1215D
	$\pm 24.0 \text{ V}$	$\pm 32 \text{ mA}$	71%	IN1224D
24 VDC	$\pm 5.0 \text{ V}$	$\pm 150 \text{ mA}$	70%	IN2405D
	$\pm 9.0 \text{ V}$	$\pm 84 \text{ mA}$	73%	IN2409D
	$\pm 12.0 \text{ V}$	$\pm 63 \text{ mA}$	78%	IN2412D
	$\pm 15.0 \text{ V}$	$\pm 50 \text{ mA}$	75%	IN2415D
	$\pm 24.0 \text{ V}$	$\pm 32 \text{ mA}$	74%	IN2424D

Mechanical Details

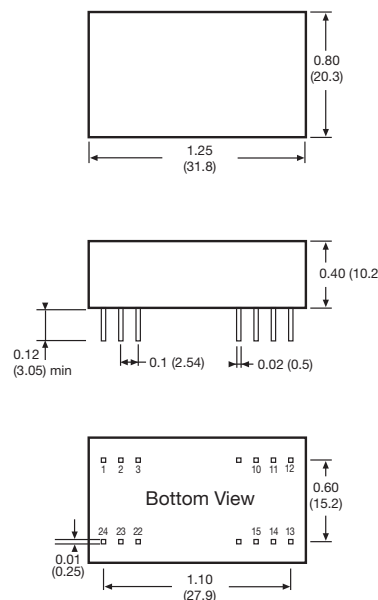

Pin	Pin Connections	
	Standard	'-H'
1	+Vin	+Vin
2	-Vout	+Vin
3	Common	No Pin
10	Common	Common
11	+Vout	Common
12	-Vin	No Pin
13	-Vin	-Vout
14	+Vout	No Pin
15	Common	+Vout
22	Common	No Pin
23	-Vout	-Vin
24	+Vin	-Vin