

# 4-6 Watts

## JCD Series



- 2:1 Input Range
- Industry Standard Package
- 1600 VDC Isolation
- Continuous Short Circuit Protection
- -40 °C to +100 °C Operating Temperature
- Single & Dual Outputs
- 3 Year Warranty

### Specification

#### Input

Input Voltage Range	<ul style="list-style-type: none"> <li>• 5 V (4.5-9 VDC)</li> <li>• 12 V (9-18 VDC)</li> <li>• 24 V (18-36 VDC)</li> <li>• 48 V (36-72 VDC)</li> </ul>
Input Current	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Input Reflected Ripple Current	<ul style="list-style-type: none"> <li>• 35 mA rms through 12 <math>\mu</math>H inductor</li> </ul>
Input Filter	<ul style="list-style-type: none"> <li>• Pi network</li> </ul>
Input Surge	<ul style="list-style-type: none"> <li>• 5 V models 15 VDC for 100 ms</li> <li>• 12 V models 24 VDC for 100 ms</li> <li>• 24 V models 40 VDC for 100 ms</li> <li>• 48 V models 80 VDC for 100 ms</li> </ul>

#### Output

Output Voltage	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Setpoint Accuracy	<ul style="list-style-type: none"> <li>• <math>\pm 1\%</math> (<math>\pm 2\%</math> for JCD0412/24/48S3V3 &amp; D03 models)</li> </ul>
Voltage Balance	<ul style="list-style-type: none"> <li>• <math>\pm 1\%</math> (<math>\pm 2\%</math> D03 models)</li> </ul>
Minimum Load	<ul style="list-style-type: none"> <li>• No minimum load required</li> </ul>
Line Regulation	<ul style="list-style-type: none"> <li>• <math>\pm 0.5\%</math></li> </ul>
Load Regulation	<ul style="list-style-type: none"> <li>• <math>\pm 0.5\%</math> single outputs, <math>\pm 1.5\%</math> for S3V3 &amp; D03 models</li> </ul>
Cross Regulation	<ul style="list-style-type: none"> <li>• <math>\pm 5\%</math> (see note 1)</li> </ul>
Ripple & Noise	<ul style="list-style-type: none"> <li>• 60 mV pk-pk, 20 MHz bandwidth. See note 2</li> </ul>
Start Up Delay	<ul style="list-style-type: none"> <li>• 20 ms typical for 5 V input models, 500 ms typical for 12/24/48 V input models</li> </ul>
Transient Response	<ul style="list-style-type: none"> <li>• 3% max deviation, recovery to within 1% in 250 <math>\mu</math>s (5% &amp; 300 <math>\mu</math>s for JCD0412/24/48S3V3 &amp; D03 models) for a 25% load change</li> </ul>
Temperature Coefficient	<ul style="list-style-type: none"> <li>• 0.02%/°C</li> </ul>
Overload Protection	<ul style="list-style-type: none"> <li>• 150% of full load on 5 V input models only</li> </ul>
Short Circuit Protection	<ul style="list-style-type: none"> <li>• Indefinite with auto recovery</li> </ul>
Maximum Capacitive Load	<ul style="list-style-type: none"> <li>• See table</li> </ul>

#### General

Efficiency	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Isolation Voltage	<ul style="list-style-type: none"> <li>• 1600 VDC Input to Output</li> <li>• For optional high isolation versions 3500 VDC Input to Output add suffix -H to model number</li> <li>• 1600 VDC Input to Case</li> <li>• 1600 VDC Output to Case</li> </ul>
Isolation Capacitance	<ul style="list-style-type: none"> <li>• 500 pF typical input to output</li> </ul>
Isolation Resistance	<ul style="list-style-type: none"> <li>• <math>10^9 \Omega</math></li> </ul>
Switching Frequency	<ul style="list-style-type: none"> <li>• 266 kHz typical</li> </ul>
Power Density	<ul style="list-style-type: none"> <li>• 4 W: 10 W/in<sup>3</sup>, 5 W: 12.5 W/in<sup>3</sup>, 6 W: 15 W/in<sup>3</sup></li> </ul>
MTBF	<ul style="list-style-type: none"> <li>• &gt;1.1 Mhrs to MIL-STD-217F at 25 °C, GB</li> </ul>

#### Environmental

Operating Temperature	<ul style="list-style-type: none"> <li>• -40 °C to +100 °C (see derating curve)</li> </ul>
Case Temperature	<ul style="list-style-type: none"> <li>• +100 °C max</li> </ul>
Storage Temperature	<ul style="list-style-type: none"> <li>• -40 °C to +125 °C</li> </ul>
Cooling	<ul style="list-style-type: none"> <li>• Convection-cooled</li> </ul>
Operating Humidity	<ul style="list-style-type: none"> <li>• Up to 95% RH, non-condensing</li> </ul>

#### EMC

Emissions	<ul style="list-style-type: none"> <li>• EN55022 Class A conducted with external components, see application note</li> </ul>
ESD Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-2, level 3, Perf Criteria B</li> </ul>
Radiated Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-3, 10 V/m, Perf Criteria A</li> </ul>
EFT/Burst	<ul style="list-style-type: none"> <li>• EN61000-4-4, level 3 Perf Criteria B*</li> </ul>
Surge	<ul style="list-style-type: none"> <li>• EN61000-4-5, level 2, Perf Criteria A*</li> </ul>
Conducted Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-6, 10 Vrms, Perf Criteria B*</li> </ul>
Magnetic Field	<ul style="list-style-type: none"> <li>• EN61000-4-8, 1 A/m, Perf Criteria B*</li> </ul>

\*External input capacitor required, 220  $\mu$ F/100 V

## Models and Ratings

Input Voltage	Output Voltage	Output Current	Input Current <sup>(1)</sup>		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
4.5-9 VDC	3.3 V	1200 mA	25 mA	1084 mA	3300 µF	73%	JCD0405S3V3†^
	5.0 V	800 mA	25 mA	1026 mA	1000 µF	78%	JCD0405S05†^
	12.0 V	333 mA	30 mA	974 mA	220 µF	82%	JCD0405S12†^
	15.0 V	266 mA	30 mA	973 mA	100 µF	82%	JCD0405S15†^
	±3.3 V	±600 mA	25 mA	1042 mA	±680 µF	76%	JCD0405D03†^
	±5.0 V	±400 mA	30 mA	1012 mA	±470 µF	79%	JCD0405D05†^
	±12.0 V	±166 mA	35 mA	963 mA	±100 µF	83%	JCD0405D12†^
	±15.0 V	±133 mA	40 mA	985 mA	±47 µF	81%	JCD0405D15†^
9-18 VDC	3.3 V	1200 mA	30 mA	445 mA	680 µF	74%	JCD0412S3V3†^
	5.0 V	800 mA	30 mA	427 mA	1000 µF	78%	JCD0412S05†^
	9.0 V	444 mA	30 mA	416 mA	470 µF	80%	JCD0412S09†^
	12.0 V	333 mA	30 mA	406 mA	100 µF	82%	JCD0412S12†^
	15.0 V	266 mA	30 mA	401 mA	100 µF	83%	JCD0412S15†^
	24.0 V	166 mA	30 mA	406 mA	22 µF	82%	JCD0412S24†^
	±3.3 V	±600 mA	30 mA	438 mA	±680 µF	76%	JCD0412D03†^
	±5.0 V	±400 mA	30 mA	427 mA	±470 µF	78%	JCD0412D05†^
	±9.0 V	±220 mA	30 mA	416 mA	±220 µF	80%	JCD0412D09†^
	±12.0 V	±166 mA	30 mA	427 mA	±47 µF	78%	JCD0412D12†^
	±15.0 V	±133 mA	30 mA	416 mA	±150 µF	80%	JCD0412D15†^
	±24.0 V	±83 mA	30 mA	416 mA	±10 µF	80%	JCD0412D24†^
18-36 VDC	3.3 V	1200 mA	20 mA	216 mA	1000 µF	77%	JCD0424S3V3†^
	5.0 V	800 mA	20 mA	208 mA	1000 µF	80%	JCD0424S05†^
	9.0 V	444 mA	20 mA	203 mA	470 µF	82%	JCD0424S09†^
	12.0 V	333 mA	20 mA	198 mA	330 µF	84%	JCD0424S12†^
	15.0 V	266 mA	20 mA	203 mA	330 µF	82%	JCD0424S15†^
	24.0 V	166 mA	20 mA	200 mA	1000 µF	83%	JCD0424S24†^
	±3.3 V	±600 mA	20 mA	216 mA	±1000 µF	77%	JCD0424D03†^
	±5.0 V	±400 mA	20 mA	208 mA	±330 µF	80%	JCD0424D05†^
	±9.0 V	±220 mA	20 mA	200 mA	±220 µF	83%	JCD0424D09†^
	±12.0 V	±166 mA	20 mA	200 mA	±68 µF	83%	JCD0424D12†^
	±15.0 V	±133 mA	20 mA	203 mA	±220 µF	82%	JCD0424D15†^
	±24.0 V	±83 mA	20 mA	210 mA	±47 µF	79%	JCD0424D24†^
36-72 VDC	3.3 V	1200 mA	15 mA	108 mA	1000 µF	76%	JCD0448S3V3†^
	5.0 V	800 mA	15 mA	104 mA	1000 µF	80%	JCD0448S05†^
	9.0 V	444 mA	15 mA	100 mA	470 µF	83%	JCD0448S09†^
	12.0 V	333 mA	15 mA	99 mA	330 µF	84%	JCD0448S12†^
	15.0 V	266 mA	15 mA	102 mA	68 µF	81%	JCD0448S15†^
	24.0 V	166 mA	15 mA	98 mA	68 µF	85%	JCD0448S24†^
	±3.3 V	±600 mA	15 mA	109 mA	±1000 µF	76%	JCD0448D03†^
	±5.0 V	±400 mA	15 mA	104 mA	±470 µF	80%	JCD0448D05†^
	±9.0 V	±220 mA	15 mA	100 mA	±220 µF	83%	JCD0448D09†^
	±12.0 V	±166 mA	15 mA	100 mA	±220 µF	83%	JCD0448D12†^
	±15.0 V	±133 mA	15 mA	100 mA	±47 µF	83%	JCD0448D15†^
	±24.0 V	±83 mA	15 mA	105 mA	±100 µF	79%	JCD0448D24†^


### Notes

- When one output is set at 100% load and the other varies between 25% & 100% load.
- Measured with 20 MHz bandwidth and 1 µF ceramic capacitor across output rails.
- Input current specified at nominal 5 V, 12 V, 24 V or 48 V input.
- For optional 3500 VDC isolation add suffix -H to part number e.g. JCD0424S12-H

† Available from Farnell & element14. See pages 284-290.

^ Available from Newark. See pages 291-296

## Mechanical Details

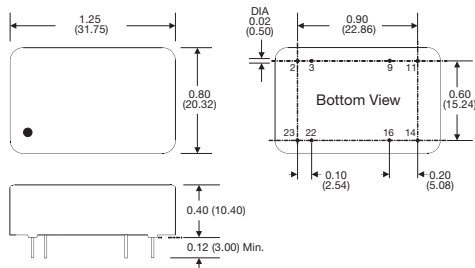


Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	N.C.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

### Notes


- All dimensions are in inches (mm)
- Weight: 0.04 lbs (18 g) approx.
- Pin diameter: 0.02 ±0.002 (0.5 ±0.005)
- Pin pitch and length tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)
- Package: 24 pin DIL nickel-coated copper

## Application Notes

### Derating Curve

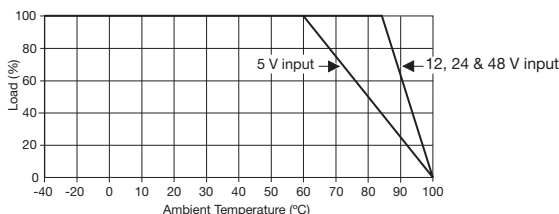

### Input Filter

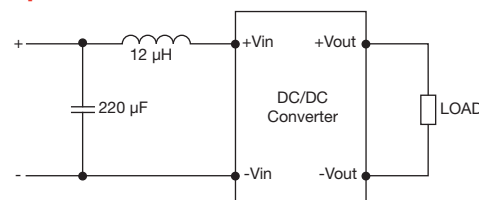

Input Voltage	Output Voltage	Output Current	Input Current <sup>(1)</sup>		Maximum Capacitive Load	Efficiency	Model Number <sup>(4)</sup>	
			No Load	Full Load				
4.5-9 VDC	3.3 V	1300 mA	25 mA	1159 mA	1000 µF	74%	JCD0505S3V3†^	
	5.0 V	1000 mA	25 mA	1298 mA	1000 µF	77%	JCD0505S05†^	
	12.0 V	417 mA	30 mA	1220 mA	330 µF	82%	JCD0505S12†^	
	15.0 V	333 mA	30 mA	1218 mA	220 µF	82%	JCD0505S15†^	
	±3.3 V	±750 mA	25 mA	1302 mA	±680 µF	76%	JCD0505D03†^	
	±5.0 V	±500 mA	30 mA	1265 mA	±330 µF	79%	JCD0505D05†^	
	±12.0 V	±208 mA	35 mA	1217 mA	±100 µF	82%	JCD0505D12†^	
	±15.0 V	±167 mA	40 mA	1221 mA	±47 µF	82%	JCD0505D15†^	
9-18 VDC	3.3 V	1300 mA	30 mA	483 mA	1000 µF	74%	JCD0512S3V3†^	
	5.0 V	1000 mA	30 mA	541 mA	1000 µF	77%	JCD0512S05†^	
	9.0 V	555 mA	30 mA	520 mA	470 µF	80%	JCD0512S09†^	
	12.0 V	417 mA	30 mA	508 mA	330 µF	82%	JCD0512S12†^	
	15.0 V	333 mA	30 mA	508 mA	100 µF	82%	JCD0512S15†^	
	24.0 V	208 mA	30 mA	508 mA	68 µF	82%	JCD0512S24†^	
	±3.3 V	±750 mA	30 mA	595 mA	±1000 µF	70%	JCD0512D03†^	
	±5.0 V	±500 mA	30 mA	541 mA	±1000 µF	77%	JCD0512D05†^	
	±9.0 V	±278 mA	30 mA	527 mA	±330 µF	79%	JCD0512D09†^	
	±12.0 V	±208 mA	30 mA	520 mA	±47 µF	80%	JCD0512D12†^	
	±15.0 V	±167 mA	30 mA	527 mA	±47 µF	79%	JCD0512D15†^	
	±24.0 V	±104 mA	30 mA	514 mA	±10 µF	81%	JCD0512D24†^	
18-36 VDC	3.3 V	1300 mA	20 mA	239 mA	1000 µF	75%	JCD0524S3V3†^	
	5.0 V	1000 mA	20 mA	261 mA	1000 µF	80%	JCD0524S05†^	
	9.0 V	555 mA	20 mA	254 mA	470 µF	82%	JCD0524S09†^	
	12.0 V	417 mA	20 mA	251 mA	1000 µF	83%	JCD0524S12†^	
	15.0 V	333 mA	20 mA	248 mA	220 µF	84%	JCD0524S15†^	
	24.0 V	208 mA	20 mA	248 mA	1000 µF	84%	JCD0524S24†^	
	±3.3 V	±750 mA	20 mA	274 mA	±470 µF	76%	JCD0524D03†^	
	±5.0 V	±500 mA	20 mA	263 mA	±680 µF	79%	JCD0524D05†^	
	±9.0 V	±278 mA	20 mA	251 mA	±220 µF	83%	JCD0524D09†^	
	±12.0 V	±208 mA	20 mA	251 mA	±220 µF	83%	JCD0524D12†^	
	±15.0 V	±167 mA	20 mA	251 mA	±22 µF	83%	JCD0524D15†^	
	±24.0 V	±104 mA	20 mA	254 mA	±22 µF	82%	JCD0524D24†^	
	36-72 VDC	3.3 V	1300 mA	12 mA	117 mA	1000 µF	76%	JCD0548S3V3†^
		5.0 V	1000 mA	12 mA	130 mA	1000 µF	80%	JCD0548S05†^
9.0 V		555 mA	12 mA	124 mA	100 µF	84%	JCD0548S09†^	
12.0 V		417 mA	12 mA	132 mA	470 µF	80%	JCD0548S12†^	
15.0 V		333 mA	12 mA	127 mA	330 µF	82%	JCD0548S15†^	
24.0 V		208 mA	12 mA	122 mA	220 µF	85%	JCD0548S24†^	
±3.3 V		±750 mA	12 mA	140 mA	±1000 µF	74%	JCD0548D03†^	
±5.0 V		±500 mA	12 mA	130 mA	±470 µF	80%	JCD0548D05†^	
±9.0 V		±278 mA	12 mA	127 mA	±220 µF	82%	JCD0548D09†^	
±12.0 V		±208 mA	12 mA	124 mA	±100 µF	84%	JCD0548D12†^	
±15.0 V		±167 mA	12 mA	128 mA	±220 µF	81%	JCD0548D15†^	
±24.0 V		±104 mA	12 mA	128 mA	±22 µF	81%	JCD0548D24†^	


### Notes

- When one output is set at 100% load and the other varies between 25% & 100% load.
- Measured with 20 MHz bandwidth and 1 µF ceramic capacitor across output rails.
- Input current specified at nominal 5 V, 12 V, 24 V or 48 V input.
- For optional 3500 VDC isolation add suffix -H to part number e.g. JCD0524S12-H

† Available from Farnell & element14. See pages 284-290.

^ Available from Newark. See pages 291-296

### Mechanical Details

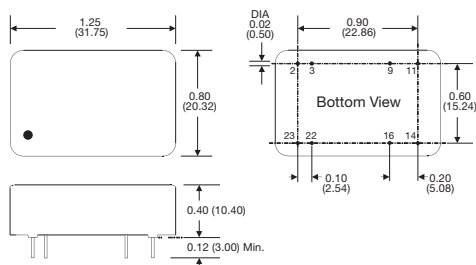


Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	N.C.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

### Notes


- All dimensions are in inches (mm)
- Weight: 0.04 lbs (18 g) approx.
- Pin diameter: 0.02 ±0.002 (0.5 ±0.005)
- Pin pitch and length tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)
- Package: 24 pin DIL nickel-coated copper

### Application Notes

#### Derating Curve

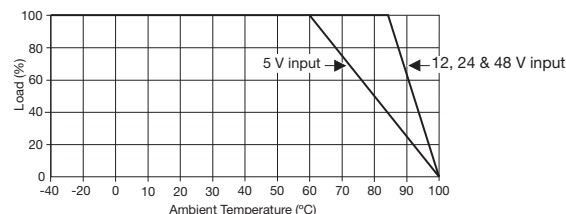

#### Input Filter

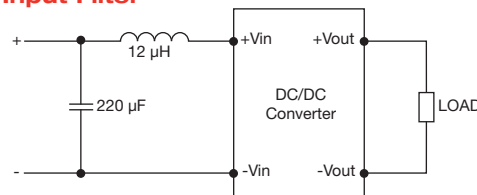

## Models and Ratings

Input Voltage	Output Voltage	Output Current	Input Current <sup>(1)</sup>		Maximum Capacitive Load	Efficiency	Model Number <sup>(9)</sup>
			No Load	Full Load			
4.5-9 VDC	3.3 V	1400 mA	25 mA	1232 mA	1000 µF	75%	JCD0605S3V3†^
	5.0 V	1200 mA	25 mA	1558 mA	1000 µF	77%	JCD0605S05†^
	12.0 V	500 mA	25 mA	1445 mA	330 µF	83%	JCD0605S12†^
	15.0 V	400 mA	30 mA	1445 mA	220 µF	83%	JCD0605S15†^
	±3.3 V	±909 mA	25 mA	1578 mA	±680 µF	76%	JCD0605D03†^
	±5.0 V	±600 mA	25 mA	1500 mA	±330 µF	80%	JCD0605D05†^
	±12.0 V	±250 mA	35 mA	1428 mA	±100 µF	84%	JCD0605D12†^
	±15.0 V	±200 mA	40 mA	1428 mA	±47 µF	84%	JCD0605D15†^
9-18 VDC	3.3 V	1400 mA	30 mA	520 mA	220 µF	74%	JCD0612S3V3†^
	5.0 V	1200 mA	30 mA	649 mA	1000 µF	77%	JCD0612S05†^
	9.0 V	666 mA	30 mA	632 mA	680 µF	79%	JCD0612S09†^
	12.0 V	500 mA	30 mA	617 mA	1000 µF	81%	JCD0612S12†^
	15.0 V	400 mA	30 mA	604 mA	100 µF	82%	JCD0612S15†^
	24.0 V	250 mA	30 mA	617 mA	100 µF	81%	JCD0612S24†^
	±3.3 V	±909 mA	30 mA	675 mA	±1000 µF	74%	JCD0612D03†^
	±5.0 V	±600 mA	30 mA	657 mA	±680 µF	76%	JCD0612D05†^
	±9.0 V	±333 mA	30 mA	617 mA	±22 µF	81%	JCD0612D09†^
	±12.0 V	±250 mA	30 mA	632 mA	±330 µF	79%	JCD0612D12†^
	±15.0 V	±200 mA	30 mA	625 mA	±100 µF	80%	JCD0612D15†^
	±24.0 V	±125 mA	30 mA	625 mA	±10 µF	80%	JCD0612D24†^
18-36 VDC	3.3 V	1400 mA	20 mA	256 mA	1000 µF	75%	JCD0624S3V3†^
	5.0 V	1200 mA	20 mA	313 mA	1000 µF	80%	JCD0624S05†^
	9.0 V	666 mA	20 mA	301 mA	680 µF	83%	JCD0624S09†^
	12.0 V	500 mA	20 mA	301 mA	1000 µF	83%	JCD0624S12†^
	15.0 V	400 mA	20 mA	301 mA	100 µF	83%	JCD0624S15†^
	24.0 V	250 mA	20 mA	294 mA	470 µF	85%	JCD0624S24†^
	±3.3 V	±909 mA	20 mA	328 mA	±1000 µF	76%	JCD0624D03†^
	±5.0 V	±600 mA	20 mA	308 mA	±680 µF	81%	JCD0624D05†^
	±9.0 V	±333 mA	20 mA	301 mA	±220 µF	83%	JCD0624D09†^
	±12.0 V	±250 mA	20 mA	301 mA	±470 µF	83%	JCD0624D12†^
	±15.0 V	±200 mA	20 mA	301 mA	±100 µF	83%	JCD0624D15†^
	±24.0 V	±125 mA	20 mA	304 mA	±100 µF	82%	JCD0624D24†^
36-72 VDC	3.3 V	1400 mA	12 mA	128 mA	2200 µF	75%	JCD0648S3V3†^
	5.0 V	1200 mA	12 mA	156 mA	1000 µF	80%	JCD0648S05†^
	9.0 V	666 mA	12 mA	148 mA	1000 µF	84%	JCD0648S09†^
	12.0 V	500 mA	12 mA	148 mA	470 µF	84%	JCD0648S12†^
	15.0 V	400 mA	12 mA	154 mA	1000 µF	81%	JCD0648S15†^
	24.0 V	250 mA	12 mA	147 mA	220 µF	85%	JCD0648S24†^
	±3.3 V	±909 mA	12 mA	164 mA	±1000 µF	76%	JCD0648D03†^
	±5.0 V	±600 mA	12 mA	156 mA	±680 µF	80%	JCD0648D05†^
	±9.0 V	±333 mA	12 mA	150 mA	±680 µF	83%	JCD0648D09†^
	±12.0 V	±250 mA	12 mA	148 mA	±330 µF	84%	JCD0648D12†^
	±15.0 V	±200 mA	12 mA	152 mA	±330 µF	82%	JCD0648D15†^
	±24.0 V	±125 mA	12 mA	150 mA	±150 µF	83%	JCD0648D24†^


### Notes

- When one output is set at 100% load and the other varies between 25% & 100% load.
- Measured with 20 MHz bandwidth and 1 µF ceramic capacitor across output rails.
- Input current specified at nominal 5 V, 12 V, 24 V or 48 V input.
- For optional 3500 VDC isolation add suffix -H to part number e.g. JCD0624S12-H

† Available from Farnell & element14. See pages 284-290.

^ Available from Newark. See pages 291-296

## Mechanical Details

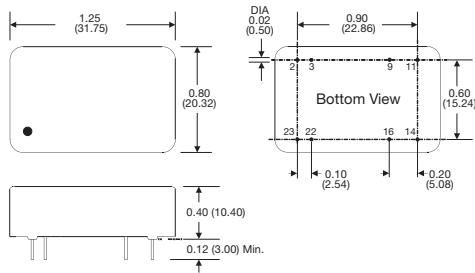


Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	N.C.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

### Notes

- All dimensions are in inches (mm)
- Weight: 0.04 lbs (18 g) approx.
- Pin diameter: 0.02 ±0.002 (0.5 ±0.005)
- Pin pitch and length tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)
- Package: 24 pin DIL nickel-coated copper

## Application Notes

### Derating Curve

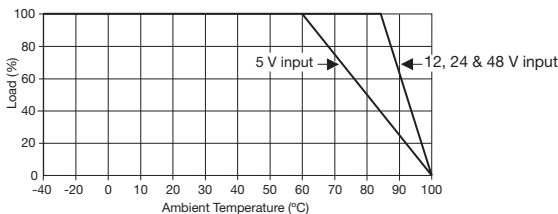

### Input Filter

